Technical Publications

Direction 2089507 Revision 3

Centricity Universal Viewer Zero Footprint (ZFP) DICOM CONFORMANCE STATEMENT

Copyright $^{\textcircled{\tiny 0}}$ 2015 by General Electric Co.

REVISION HISTORY

Revision	Date	Author	Description	
1	7-May-2015	Shilpa Venkataraman	Initial version for Centricity Universal View Zero Footprint v6.0	
2	16-June-2015	Rugma Ramesh	Added SOPs for Multi-Frame Grayscale Byte SC Image, Multi-Frame True Color SC Image, NM Image (Retired) and RT image.	
3	29-June-2015	Rugma Ramesh	Updated all existing SOP Classes and SOP Class UIDs	

		UNIVERS	AL VIE	EWER Z	FP VEI	RSION	6.0-S	P1
DICOM (CONFOR	RMANCE	STATE	MENT -	- DOC1	166357	8 REV	1.3

GE Healthcare
DIR 2089507 REV 3

THIS PAGE LEFT INTENTIONALLY BLANK

CONFORMANCE STATEMENT OVERVIEW

The Universal Viewer ZFP is a viewing application of DICOM objects that are stored on the Centricity Enterprise Archive or the Centricity PACS server. All of the networking, database, and other services are provided by the Centricity Enterprise Archive or the Centricity PACS server. This conformance claim refers to the conformance claim for the Centricity Enterprise Archive or the Centricity PACS server for all such services. The Universal Viewer ZFP accesses rendered DICOM Objects as a client user of WADO-URI service. Table 0.1 provides an overview of the DICOM objects can be displayed by ZFP.

Table 0.1 – Displayable SOP Classes

SOP Classes	SOP Class UID
Computed Radiography Image Storage	1.2.840.10008.5.1.4.1.1.1
CT Image Storage	1.2.840.10008.5.1.4.1.1.2
Enhanced CT Image Storage	1.2.840.10008.5.1.4.1.1.2.1
Ultrasound Image Storage (Retired)	1.2.840.10008.5.1.4.1.1.6
Ultrasound Multi-Frame Image Storage (Retired)	1.2.840.10008.5.1.4.1.1.3
MR Image Storage	1.2.840.10008.5.1.4.1.1.4
Enhanced MR Image Storage	1.2.840.10008.5.1.4.1.1.4.1
Nuclear Medicine Image Storage	1.2.840.10008.5.1.4.1.1.20
Positron Emission Tomography Image Storage	1.2.840.10008.5.1.4.1.1.128
Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7
Ultrasound Image Storage	1.2.840.10008.5.1.4.1.1.6.1
Ultrasound Multi-frame Image Storage	1.2.840.10008.5.1.4.1.1.6.1.2
X-Ray Angiographic Image Storage	1.2.840.10008.5.1.4.1.1.12.1
X-Ray Radiofluoroscopic Image Storage	1.2.840.10008.5.1.4.1.1.12.2
Digital X-Ray Image Storage - For Presentation	1.2.840.10008.5.1.4.1.1.1
Digital X-Ray Image Storage - For Processing	1.2.840.10008.5.1.4.1.1.1.1
Digital Mammography X-Ray Image Storage – for Presentation	1.2.840.10008.5.1.4.1.1.1.2
Digital Mammography X-Ray Image Storage – for Processing	1.2.840.10008.5.1.4.1.1.2.1
Digital Intra-oral X-Ray Image Storage - For Presentation	1.2.840.10008.5.1.4.1.1.3
Digital Intra-oral X-Ray Image Storage - For Processing	1.2.840.10008.5.1.4.1.1.3.1
VL Endoscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.1
VL Microscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.2
VL Slide-Coordinates Microscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.3
VL Photographic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.4
Key Object Selection Document	1.2.840.10008.5.1.4.1.1.88.59
Basic Text SR	1.2.840.10008.5.1.4.1.1.88.11

GE HealthcareDIR 2089507 REV 3

SOP Classes	SOP Class UID	
Breast Tomosynthesis Image Storage	1.2.840.10008.5.1.4.1.1.13.1.3	
Encapsulated PDF Storage	1.2.840.10008.5.1.4.1.1.104.1	
Ophthalmic Tomography Image Storage	1.2.840.10008.5.1.4.1.1.77.1.5.4	
Multi-frame Grayscale Byte Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7.2	
Multi-frame True Color Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7.4	
NM Image (Retired)	1.2.840.10008.5.1.4.1.1.5	
RT Image	1.2.840.10008.5.1.4.1.1.481.1	

TABLE OF CONTENTS

1.	INTRODUCTION	7
1.1	Overview	7
1.2	Overall DICOM Conformance Statement Document Structure	8
1.3	Intended Audience	9
1.4	Scope and Field of Application	9
1.5	Important Remarks	10
1.6	References	10
1.7	Definitions	11
1.8	Symbols and Abbreviations	12
2.	NETWORK CONFORMANCE STATEMENT	16
2.1	Introduction	16
2.2	Implementation Model	17
2.3	Support of Extended Character Sets	17
2.4	Photometric Interpretation Support	18
2.5	Security Profiles	18
26	WADO-URI	18

1. INTRODUCTION

1.1 OVERVIEW

This DICOM Conformance Statement is divided into Sections as described below:


Section 1 (Introduction), which describes the overall structure, intent, and references for this Conformance Statement

Section 2 (Network Conformance Statement), which specifies the GEHC equipment compliance to the DICOM requirements for the implementation of Networking features.

1.2 OVERALL DICOM CONFORMANCE STATEMENT DOCUMENT STRUCTURE

The Documentation Structure of the GEHC DICOM Conformance Statements is shown in the Illustration below.

GEHC DICOM Conformance Statements

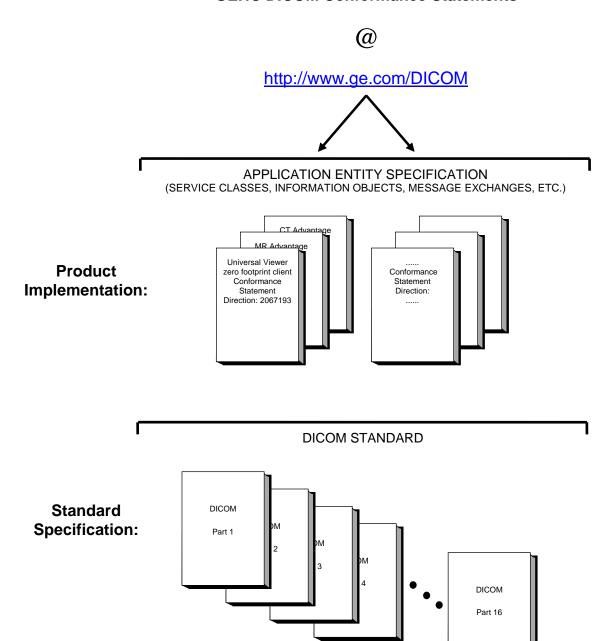

This document specifies the DICOM implementation. It is entitled:

Universal Viewer ZFP
Conformance Statement for DICOM
Direction 2089507

This DICOM Conformance Statement documents the DICOM Conformance Statement and Technical Specification required to interoperate with the GEHC network interface.

The GEHC Conformance Statement, contained in this document, also specifies the Lower Layer communications which it supports (e.g., TCP/IP). However, the Technical Specifications are defined in the DICOM Part 8 standard.

For more information regarding DICOM, copies of the Standard may be obtained on the Internet at http://medical.nema.org. Comments on the Standard may be addressed to:

DICOM Secretariat NEMA 1300 N. 17th Street, Suite 1752 Rosslyn, VA 22209 USA Phone: +1.703.841.3200

1.3 INTENDED AUDIENCE

The reader of this document is concerned with software design and/or system integration issues. It is assumed that the reader of this document is familiar with the DICOM Standard and with the terminology and concepts which are used in that Standard.

1.4 SCOPE AND FIELD OF APPLICATION

It is the intent of this document to provide an unambiguous specification for GEHC implementations. This specification, called a Conformance Statement, includes a DICOM Conformance Statement and is necessary to ensure proper processing and interpretation of GEHC medical data exchanged using DICOM. The GEHC Conformance Statements are available to the public.

The reader of this DICOM Conformance Statement should be aware that different GEHC devices are capable of using different Information Object Definitions. For example, a GEHC CT Scanner may send images using the CT Information Object, MR Information Object, Secondary Capture Object, etc.

Included in this DICOM Conformance Statement are the Module Definitions which define all data elements used by this GEHC implementation. If the user encounters unspecified private data elements while parsing a GEHC Data Set, the user is well advised to ignore those data elements (per the DICOM standard). Unspecified private data element information is subject to change without notice. If, however, the device is acting as a "full fidelity storage device", it should retain and re-transmit all of the private data elements which are sent by GEHC devices.

DIR 2089507 REV 3

1.5 IMPORTANT REMARKS

The use of these DICOM Conformance Statements, in conjunction with the DICOM Standards, is intended to facilitate communication with GE imaging equipment. However, by itself, it is not sufficient to ensure that inter-operation will be successful. The user (or user's agent) needs to proceed with caution and address at least four issues:

- Integration The integration of any device into an overall system of interconnected devices goes beyond the scope of standards (DICOM v3.0), and of this introduction and associated DICOM Conformance Statements when interoperability with non-GE equipment is desired. The responsibility to analyze the applications requirements and to design a solution that integrates GE imaging equipment with non-GE systems is the user's responsibility and should not be underestimated. The user is strongly advised to ensure that such an integration analysis is correctly performed.
- Validation Testing the complete range of possible interactions between any GE device and non-GE devices, before the connection is declared operational, should not be overlooked. Therefore, the user should ensure that any non-GE provider accepts full responsibility for all validation required for their connection with GE devices. This includes the accuracy of the image data once it has crossed the interface between the GE imaging equipment and the non-GE device and the stability of the image data for the intended applications.

Such a validation is required before any clinical use (diagnosis and/or treatment) is performed. It applies when images acquired on GE imaging equipment are processed/displayed on a non-GE device, as well as when images acquired on non-GE equipment is processed/displayed on a GE console or workstation.

- Future Evolution GE understands that the DICOM Standard will evolve to meet the user's growing requirements. GE is actively involved in the development of the DICOM Standard. DICOM will incorporate new features and technologies and GE may follow the evolution of the Standard. The GEHC protocol is based on DICOM as specified in each DICOM Conformance Statement. Evolution of the Standard may require changes to devices which have implemented DICOM. In addition, GE reserves the right to discontinue or make changes to the support of communications features (on its products) described by these DICOM Conformance Statements. The user should ensure that any non-GE provider, which connects with GE devices, also plans for the future evolution of the DICOM Standard. Failure to do so will likely result in the loss of function and/or connectivity as the DICOM Standard changes and GE Products are enhanced to support these changes.
- Interaction It is the sole responsibility of the non-GE provider to ensure that communication with the interfaced equipment does not cause degradation of GE imaging equipment performance and/or function.

1.6 REFERENCES

- 1. Digital Imaging and Communications in Medicine (DICOM) Standards, available free at http://medical.nema.org/
- 2. Centricity Enterprise Archive V4.0 DICOM CONFORMANCE STATEMENT, DOC0708777

3. Centricity PACS Version 4.0 DICOM CONFORMANCE STATEMENT, DOC1145900

1.7 DEFINITIONS

Informal definitions are provided for the following terms used in this Conformance Statement. The DICOM Standard is the authoritative source for formal definitions of these terms.

Abstract Syntax – the information agreed to be exchanged between applications, generally equivalent to a Service/Object Pair (SOP) Class. Examples: Verification SOP Class, Modality Worklist Information Model Find SOP Class, Computed Radiography Image Storage SOP Class.

Application Entity (AE) – an end point of a DICOM information exchange, including the DICOM network or media interface software; i.e., the software that sends or receives DICOM information objects or messages. A single device may have multiple Application Entities.

Application Entity Title – the externally known name of an *Application Entity*, used to identify a DICOM application to other DICOM applications on the network.

Application Context – the specification of the type of communication used between *Application Entities*. Example: DICOM network protocol.

Association – a network communication channel set up between *Application Entities*.

Attribute – – a unit of information in an object definition; a data element identified by a *tag*. The information may be a complex data structure (Sequence), itself composed of lower level data elements. Examples: Patient ID (0010,0020), Accession Number (0008,0050), Photometric Interpretation (0028,0004), Procedure Code Sequence (0008,1032).

Information Object Definition (IOD) – the specified set of *Attributes* that comprise a type of data object; does not represent a specific instance of the data object, but rather a class of similar data objects that have the same properties. The *Attributes* may be specified as Mandatory (Type 1), Required but possibly unknown (Type 2), or Optional (Type 3), and there may be conditions associated with the use of an Attribute (Types 1C and 2C). Examples: MR Image IOD, CT Image IOD, Print Job IOD.

Joint Photographic Experts Group (JPEG) – a set of standardized image compression techniques, available for use by DICOM applications.

Media Application Profile – the specification of DICOM information objects and encoding exchanged on removable media (e.g., CDs)

Module – a set of *Attributes* within an *Information Object Definition* that are logically related to each other. Example: Patient Module includes Patient Name, Patient ID, Patient Birth Date, and Patient Sex.

Negotiation – first phase of *Association* establishment that allows *Application Entities* to agree on the types of data to be exchanged and how that data will be encoded.

Presentation Context – the set of DICOM network services used over an Association, as negotiated between Application Entities; includes Abstract Syntaxes and Transfer Syntaxes.

Protocol Data Unit (PDU) – a packet (piece) of a DICOM message sent across the network. Devices must specify the maximum size packet they can receive for DICOM messages.

Security Profile – a set of mechanisms, such as encryption, user authentication, or digital signatures, used by an *Application Entity* to ensure confidentiality, integrity, and/or availability of exchanged DICOM data

Service Class Provider (SCP) – role of an *Application Entity* that provides a DICOM network service; typically, a server that performs operations requested by another *Application Entity* (*Service Class User*). Examples: Picture Archiving and Communication System (image storage SCP, and image query/retrieve SCP), Radiology Information System (modality worklist SCP).

Service Class User (SCU) – role of an *Application Entity* that uses a DICOM network service; typically, a client. Examples: imaging modality (image storage SCU, and modality worklist SCU), imaging workstation (image guery/retrieve SCU)

Service/Object Pair (SOP) Class – the specification of the network or media transfer (service) of a particular type of data (object); the fundamental unit of DICOM interoperability specification. Examples: Ultrasound Image Storage Service, Basic Grayscale Print Management.

Service/Object Pair (SOP) Instance – an information object; a specific occurrence of information exchanged in a *SOP Class*. Examples: a specific x-ray image.

Tag – a 32-bit identifier for a data element, represented as a pair of four digit hexadecimal numbers, the "group" and the "element". If the "group" number is odd, the tag is for a private (manufacturer-specific) data element. Examples: (0010,0020) [Patient ID], (07FE,0010) [Pixel Data], (0019,0210) [private data element]

Transfer Syntax – the encoding used for exchange of DICOM information objects and messages. Examples: *JPEG* compressed (images), little endian explicit value representation.

Unique Identifier (UID) – a globally unique "dotted decimal" string that identifies a specific object or a class of objects; an ISO-8824 Object Identifier. Examples: Study Instance UID, SOP Class UID, SOP Instance UID.

Value Representation (VR) – the format type of an individual DICOM data element, such as text, an integer, a person's name, or a code. DICOM information objects can be transmitted with either explicit identification of the type of each data element (Explicit VR), or without explicit identification (Implicit VR); with Implicit VR, the receiving application must use a DICOM data dictionary to look up the format of each data element.

1.8 SYMBOLS AND ABBREVIATIONS

AE Application Entity

AET Application Entity Title

CAD Computer Aided Detection

CDA Clinical Document Architecture

DIR 2089507	REV 3
-------------	-------

	DICOM CONFORMANCE STATEMENT
CD-R	Compact Disk Recordable
CSE	Customer Service Engineer
CR	Computed Radiography
СТ	Computed Tomography
DHCP	Dynamic Host Configuration Protocol
DICOM	Digital Imaging and Communications in Medicine
DIT	Directory Information Tree (LDAP)
DN	Distinguished Name (LDAP)
DNS	Domain Name System
DX	Digital X-ray
FSC	File-Set Creator
FSU	File-Set Updater
FSR	File-Set Reader
GSDF	Grayscale Standard Display Function
GSPS	Grayscale Softcopy Presentation State
HIS	Hospital Information System
HL7	Health Level 7 Standard
IHE	Integrating the Healthcare Enterprise
IOD	Information Object Definition
IPv4	Internet Protocol version 4
IPv6	Internet Protocol version 6
ISO	International Organization for Standards
Ю	Intra-oral X-ray
JPEG	Joint Photographic Experts Group
LDAP	Lightweight Directory Access Protocol
LDIF	LDAP Data Interchange Format
LUT	Look-up Table
МЛР	Modication Administration Pacard

Medication Administration Record

MAR

MPEG Moving Picture Experts Group

MG Mammography (X-ray)

MPPS Modality Performed Procedure Step

MR Magnetic Resonance Imaging

MSPS Modality Scheduled Procedure Step

MTU Maximum Transmission Unit (IP)

MWL Modality Worklist

NM Nuclear Medicine

NTP Network Time Protocol

O Optional (Key Attribute)

OCT Ophthalmic Tomography

OP Ophthalmic Photography

OSI Open Systems Interconnection

PACS Picture Archiving and Communication System

PET Positron Emission Tomography

PDF Portable Document Format

PDU Protocol Data Unit

R Required (Key Attribute)

RDN Relative Distinguished Name (LDAP)

RF Radiofluoroscopy

RIS Radiology Information System

RT Radiotherapy

SC Secondary Capture

SCP Service Class Provider

SCU Service Class User

SOP Service-Object Pair

SPS Scheduled Procedure Step

SR Structured Reporting

GE Healthcare	
DIR 2089507 REV 3	_

IR 2089507 REV 3		
IIX 2009307 IXEV 3	TCP/IP	Transmission Control Protocol/Internet Protocol
	U	Unique (Key Attribute)
	UL	Upper Layer
	US	Ultrasound
	VL	Visible Light
	VR	Value Representation
	XA	X-ray Angiography

2. NETWORK CONFORMANCE STATEMENT

2.1 INTRODUCTION

This section of the DICOM Conformance Statement specifies the Universal Viewer ZFP compliance to DICOM requirements for **Networking** features.

The Universal Viewer ZFP is a viewing application. ZFP does not directly communicate using DICOM network protocols with external equipment however it does read DICOM objects from the Centricity Enterprise Archive or the Centricity PACS server. This section will define the DICOM objects supported by the application and any limitations dictated by DICOM defined content within the objects.

Table 2-1 lists the DICOM objects supported by the Universal Viewer ZFP for viewing purposes. Although the host server may support additional SOP Classes, the Universal Viewer ZFP is only able to interpret objects that meet the conditions in the table below.

Table 2-1 - Displayable SOP Classes

SOP Classes	SOP Class UID
Computed Radiography Image Storage	1.2.840.10008.5.1.4.1.1.1
CT Image Storage	1.2.840.10008.5.1.4.1.1.2
Enhanced CT Image Storage	1.2.840.10008.5.1.4.1.1.2.1
Ultrasound Image Storage (Retired)	1.2.840.10008.5.1.4.1.1.6
Ultrasound Multi-Frame Image Storage (Retired)	1.2.840.10008.5.1.4.1.1.3
MR Image Storage	1.2.840.10008.5.1.4.1.1.4
Enhanced MR Image Storage	1.2.840.10008.5.1.4.1.1.4.1
Nuclear Medicine Image Storage	1.2.840.10008.5.1.4.1.1.20
Positron Emission Tomography Image Storage	1.2.840.10008.5.1.4.1.1.128
Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7
Ultrasound Image Storage	1.2.840.10008.5.1.4.1.1.6.1
Ultrasound Multi-frame Image Storage	1.2.840.10008.5.1.4.1.1.6.1.2
X-Ray Angiographic Image Storage	1.2.840.10008.5.1.4.1.1.12.1
X-Ray Radiofluoroscopic Image Storage	1.2.840.10008.5.1.4.1.1.12.2
Digital X-Ray Image Storage - For Presentation	1.2.840.10008.5.1.4.1.1.1
Digital X-Ray Image Storage - For Processing	1.2.840.10008.5.1.4.1.1.1.1
Digital Mammography X-Ray Image Storage – for Presentation	1.2.840.10008.5.1.4.1.1.1.2
Digital Mammography X-Ray Image Storage – for Processing	1.2.840.10008.5.1.4.1.1.2.1
Digital Intra-oral X-Ray Image Storage - For	1.2.840.10008.5.1.4.1.1.1.3

SOP Classes	SOP Class UID
Presentation	
Digital Intra-oral X-Ray Image Storage - For Processing	1.2.840.10008.5.1.4.1.1.3.1
VL Endoscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.1
VL Microscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.2
VL Slide-Coordinates Microscopic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.3
VL Photographic Image Storage	1.2.840.10008.5.1.4.1.1.77.1.4
Key Object Selection Document	1.2.840.10008.5.1.4.1.1.88.59
Basic Text SR	1.2.840.10008.5.1.4.1.1.88.11
Breast Tomosynthesis Image Storage	1.2.840.10008.5.1.4.1.1.13.1.3
Encapsulated PDF Storage	1.2.840.10008.5.1.4.1.1.104.1
Ophthalmic Tomography Image Storage	1.2.840.10008.5.1.4.1.1.77.1.5.4
Multi-frame Grayscale Byte Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7.2
Multi-frame True Color Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7.4
NM Image (Retired)	1.2.840.10008.5.1.4.1.1.5
RT Image	1.2.840.10008.5.1.4.1.1.481.1

2.2 IMPLEMENTATION MODEL

2.2.1 Application Data Flow Diagram

Refer to the DICOM Conformance Statement of the Centricity Enterprise Archive or the Centricity PACS server that Universal Viewer ZFP is deployed with.

2.2.2 Real-World Activity – Viewing a DICOM Object

The user can load any supported DICOM object into the Universal Viewer ZFP for viewing.

2.3 SUPPORT OF EXTENDED CHARACTER SETS

TABLE 2.3 Extended Character Set Support

metal tio this indicate of the appoint						
Encoding	DICOM Term in Specific Character Set (0008,0005)	Supported Languages				
ASCII	Attribute is not present or ISO IR-6	English				

While the backend server may support additional character sets, ZFP will display in the user interface only characters specified as within ISO IR-6 (ASCII). The Universal Viewer ZFP supports only the English language.

2.4 PHOTOMETRIC INTERPRETATION SUPPORT

While the backend server may support additional values for photometric interpretation, the UNIVERSAL VIEWER ZFP will only display SOP instances that contain one of the following values for Photometric Interpretation (0028,0004):

- MONOCHROME1
- MONOCHROME2
- RGB

2.5 SECURITY PROFILES

The product does not conform to any defined DICOM Security Profiles.

It is assumed that the product is used within a secured environment. It is assumed that a secured environment includes at a minimum:

- 1. Firewall or router protections to ensure that only approved external hosts have network access to the product.
- 2. Firewall or router protections to ensure that the product only has network access to approved external hosts and services.
- Any communications with external hosts and services outside the locally secured environment use appropriate secure network channels (such as a Virtual Private Network (VPNI)

2.6 WADO-URI SERVICE

This ZFP-Patient Timeline product implements the WADO-URI services as a client user for access to rendered DICOM SOP Instances that are stored on a server supporting DICOM WADO-URI service.

TABLE 2.4 Network Services

Network Service	User of Service (Client)	Provider of Service (Server)
WADO - URI - Retrieve Rendered Imaging Document	Yes	No

2.6.1 WADO-URI Specification

TABLE 2.5 WADO-URI Retrieve Imaging Document Specification

Parameter	Restrictions	
Mime Type	Image JPEG	