## Drawing Index

These sheets are a document set and should not be separated. Electrical information and references are contained on all sheets.

SITE READINESS

C 1

EQUIPMENT LAYOUT

(Equipment locations, heat loads, component weights, environmental specs)

STRUCTURAL LAYOUT

S1

(Structural support/mounting locations for floor/wall/ceiling, wall support elevations)

STRUCTURAL DETAILS

S2

(Floor and Ceiling loading information)

ELECTRICAL LAYOUT E

(Contractor supplied wiring, interconnect methods, junction point locations and descriptions)

ELECTRICAL SPECIFICATIONS

(Maximum wiring run lengths, interconnect diagram, system power specifications)

ELECTRICAL DETAILS

E3

EQUIPMENT DETAILS

D1 THRU D2

These drawings indicate the placement and interconnection of the listed equipment components. These drawings are not construction or site preparation drawings. Customer remains ultimately responsible for preparing the site to accommodate the operation of such equipment in compliance with GE Healthcare's written specifications and all applicable federal, state, and/or local requirements.

## \* REQUIRED REFERENCE \*

Optima PET-CT

560

### Pre Installation Manual

5266541-1EN

A mandatory component of this drawing set is the GE Healthcare Pre Installation manual. Failure to reference the Pre Installation manual will result in incomplete documentation required for site design and preparation.

Pre Installation documents for GE Healthcare products can be accessed on the web at:

www.gehealthcare.com/siteplanning

# GE Healthcare



## PET-CT Site Planning




## Customer Site Readiness Requirements

- Any deviation from these drawings must be communicated in writing to and reviewed by your local GE Healthcare Installation Project Manager prior to making changes.
- Make arrangements for any rigging, special handling, or facility modifications that must be made to deliver the equipment to the installation site. If desired, your local GE Healthcare Installation Project Manager can supply a reference list of rigging contractors.
- New construction requires the following; 1. Secure area for equipment,
   2. Power for drills and other test equipment,
   3. Capability for image analysis,
   4. Restrooms.
- Provide for refuse removal and disposal (e.g. crates, cartons, packing)
- Contact a radiation physicist or consultant to specify radiation containment requirements.

## GE Equipment Delivery Requirements

The items on the GE Healthcare Site Readiness Checklist are REQUIRED to facilitate equipment delivery to the IS site. Equipment will not be delivered if these requirements are not satisfied.

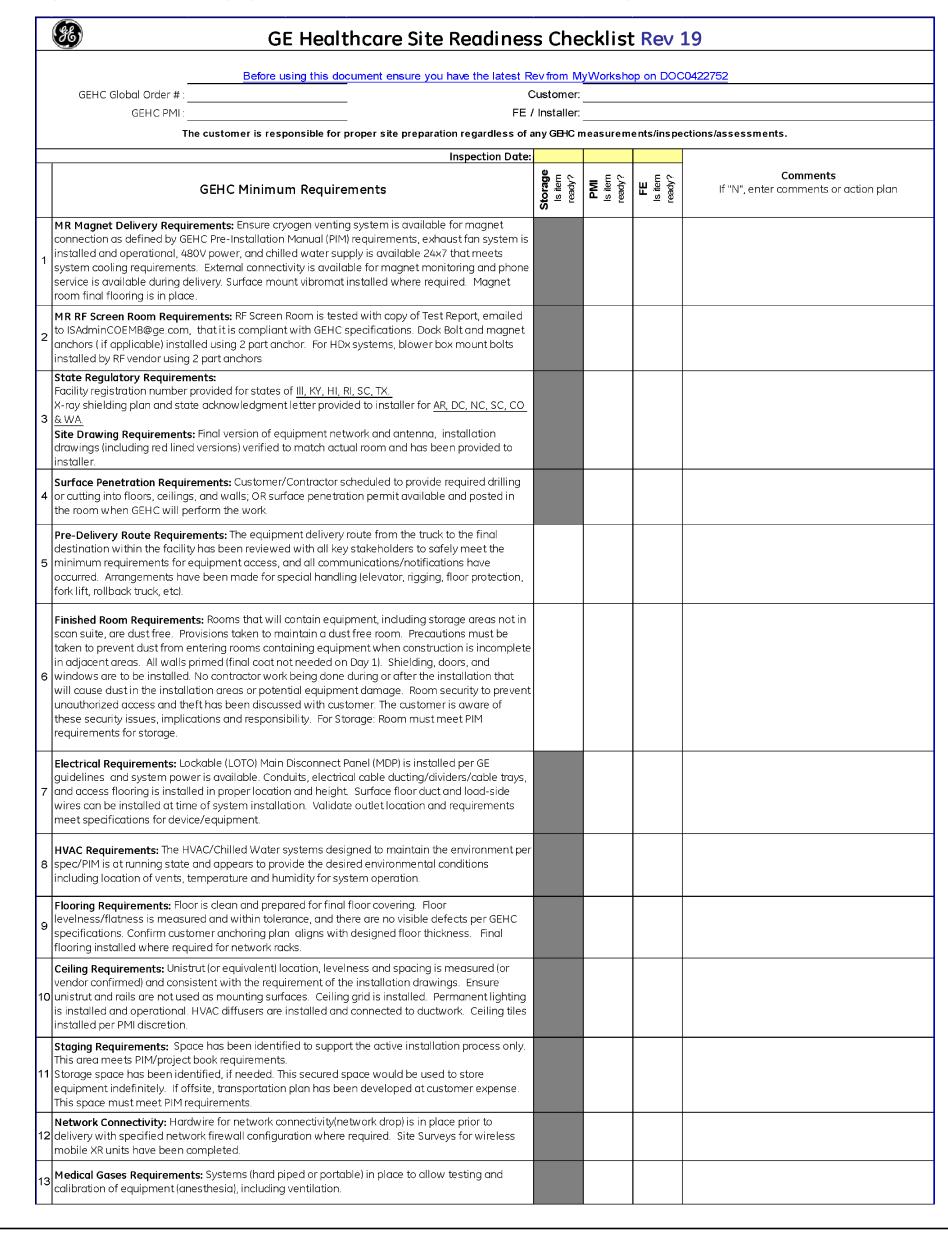

Healthcare

plementation - Design

**קה חפט** sare Project Impleme

Healthcare

**36** 

SITE READINESS

IMA PET/CT 560

GEST LOCATION OF GE HEALTHCARE EQUIPMENT
ECTRICAL WIRING DETAILS AND ROOM ARRANGEMENT
C EFFORT HAS BEEN MADE TO CONFORM DETAILS
D TO BE INSTALLED. IT IS NOT TO BE USED FOR
SS, HOWEVER, AND THE COMPANY CANNOT ACCEPT

MODALIIY IYPE: UP IIMA
THIS PLAN IS SUBMITTED TO SUGGEST L
AND ASSOCIATED APPARATUS, ELECTRICAI
IN PREPARING THIS PLAN, EVERY EFFORTO ACTUAL EQUIPMENT EXPECTED TO BE

12-24f Typical layout

PROJECT REVISION

12-24f 05

DATE: 06.JUN.16

DRAWN BY: DMH

CHECKED BY: REK

REVISION HISTO

RQ - 161174



SCALE: 1/4" = 1'-0"RECOMMENDED CEILING HEIGHT = 9'-0"EQUIPMENT LAYOUT

> 14'-3" [4.34M]

> > EXAM

ROOM

7'-3" [2.20M]

CONTROL

14'-3"

[4.34M]

ROOM

This equipment layout indicates the placement and interconnection of the indicated equipment components. There may be federal, state, and/or local requirements that could impact the placement of these components. It remains the Customer's responsibility for ensuring the site and final equipment placement complies with all applicable federal, state, and/or local requirements.

#### IMPORTANT CUSTOMER READINESS ALERT:

THIS EQUIPMENT INVOLVES THE USE OF RADIOACTIVE ISOTOPES, INCLUDING THOSE SOURCES NECESSARY FOR EQUIPMENT CALIBRATION. APPROPRIATE REGULATORY COMPLIANCE AND LICENSING MUST BE ARRANGED BY THE CUSTOMER EARLY IN THE PLANNING PROCESS AND THEN DEMONSTRATED/AVAILABLE FOR EQUIPMENT INSTALLATION.

> NOTE: DELIVERY PATH DOWN CORRIDORS FOR GANTRY'S AND TABLE MUST BE EVALUATED PRIOR TO CONSTRUCTION, AS 90 DEGREE TURNS REQUIRE SPECIFIC CORRIDOR WIDTH.

#### ANCILLARY ITEMS

### CUSTOMER/CONTRACTOR SUPPLIED AND INSTALLED ITEMS

ITEM DESCRIPTION (\* INDICATES EXISTING)

X-RAY ON WARNING LIGHT - AVAILABLE FROM GE SUPPLY CALL: 800-200-9760 GE CAT. NO. WXIABWW-OF-XIU MINIMUM DOOR OPENING FOR EQUIPMENT DELIVERY IS 42 IN. W  $\times$  82 IN. H [1067mm  $\times$  2083mm], CONTINGENT ON A 71 IN. [1803mm] CORRIDOR WIDTH

DOOR LIMIT SWITCH (REQUIRED IN SOUTH CAROLINA, OTHERWISE NEEDED ONLY IF REQUIRED BY STATE/LOCAL CODES)

COUNTER TOP FOR EQUIPMENT-MINIMUM DEPTH 24 in. Or additional shelving may be required PROVIDE GROMMETED OPENINGS AS REQUIRED TO ROUTE INTERCONNECT CABLES TO RACEWAY BELOW COUNTERTOP.

LEAD GLASS WINDOW

THE FOLLOWING ITEMS ARE AVAILABLE FROM GE HEALTHCARE TECHNOLOGIES. CONTACT YOUR LOCAL GE HEALTHCARE SERVICE REPRESENTATIVE FOR PRICING AND AVAILABILITY.

E4502RL WARNING LIGHT CONTROL Or equivalent max 24V controller.

MAIN DISCONNECT CONTROL GEMS CAT.NO. E4502AB 90 lbs., SEE DETAIL R4502AD. (IF A UPS IS NOT OR WILL NOT BE ORDERED, THE E4502AD CAN BE USED.)

#### GENERAL SPECIFICATIONS

- THE REQUIRED CEILING HEIGHT INDICATED ON THESE PLANS IS TO ENSURE EQUIPMENT FUNCTION IS NOT INHIBITED. CONSULT WITH YOUR LOCAL GEHC IS SPECIALIST REGARDING ACCEPTABILITY OF OTHER CEILING HEIGHTS.
- CHECK ALL DOOR OPENINGS AND HALLWAYS FROM DELIVERY LOCATION TO WHERE EQUIPMENT IS TO BE INSTALLED TO ENSURE THE ROUTE PHYSICALLY AND STRUCTURALLY WILL ACCOMODATE THE EQUIPMENT AS SHIPPED.
- RADIATION PROTECTION REQUIREMENTS ARE NOT INDICATED ON THIS PLAN. WHERE NEEDED PER NATIONAL OR LOCAL CODE THEY SHALL BE SPECIFIED BY A QUALIFIED RADIOLOGICAL PHYSICIST.
- THE DEVELOPMENT OF THE EQUIPMENT LAYOUT, ROOM DIMENSIONS, MECHANICAL AND ELECTRICAL SUGGESTIONS IS PREDICATED UPON THE BEST INFORMATION OBTAINABLE FROM THE SITE, COUPLED WITH THE CUSTOMER'S KNOWN DESIRES. ARCHITECTURAL OR ELECTRICAL CHANGES INCLUDING RELOCATION OF EQUIPMENT ILLUSTRATED ON THIS DRAWING IS ALLOWED ONLY WITH NOTIFICATION, IN WRITING, AND REVIEW BY GEHC SERVICE DEPARTMENT. EQUIPMENT OPERATION, SERVICEABILITY, AND RESTRICTING CABLE LENGTHS, ETC., MAKE THIS ESSENTIAL FOR A PROPER IS. GEHC RESERVES THE RIGHT TO MAKE ON THE JOB CHANGES BECAUSE OF CUSTOMER REQUIREMENTS AND/OR OBSTACLES IN CONSTRUCTION, ETC...
- ALL WORK TO BE IN COMPLIANCE WITH NATIONAL AND LOCAL BUILDING SAFETY CODES.
- DIMENSIONS ARE TO FINISHED SURFACES OF ROOM

#### SITE ENVIRONMENT SPECIFICATIONS

- AMBIENT OPERATING TEMPERATURE: 64° F TO 79° F, (18° C TO 26° C)
- HUMIDITY: 30 TO 60 PERCENT NON-CONDENSING, STATIC CHARGES ASSOCIATED WITH LOWER HUMIDITY LEVELS MAY INTERFERE WITH SYSTEM OPERATION. INTERFERE WITH SYSTEM OPERATION.
- ALTITUDE: NOT TO EXCEED 7,875 FT. (2400M) ABOVE SEA LEVEL. O DO NOT
- RESTRICT THE AIR INTAKE OR AIR EXHAUST OF THE SYSTEM COMPONENTS. ENVIRONMENTAL CONDITIONS LISTED ABOVE MUST BE MAINTAINED AT ALL
- TIMES INCLUDING FOR EXAMPLE OVERNIGHT, WEEKENDS, AND HOLIDAYS. BACKGROUND RADIATION SHOULD BE KEPT TO A MINIMUM. RADIOACTIVE SOURCES MUST BE KEPT IN SHIELDED CONTAINERS AND THE EXAMINATION
- ROOM SHIELDED FROM EXTERNAL SOURCES. DO NOT PLACE PET EQUIPMENT NEAR REGISTERS, WINDOWS OR OTHER COMPONENTS THAT COULD AFFECT TEMPERATURE LEVEL CHANGES IN THE PET EQUIPMENT VICINITY.

#### MAGNETIC INTERFERENCE SPECIFICATIONS

SCANNER MUST BE LOCATED IN AMBIENT STATIC MAGNETIC FIELDS OF LESS THAN 1.0 GAUSS TO GUARANTEE SPECIFIED IMAGING PERFORMANCE.

COMPUTER EQUIPMENT MUST BE LOCATED IN AMBIENT STATIC MAGNETIC FIELDS OF LESS THAN 10 GAUSS TO GUARANTEE DATA INTEGRITY.

DIAGNOSTIC CONSOLE MUST BE LOCATED IN AMBIENT STATIC MAGNETIC FIELDS OF LESS THAN 1 GAUSS TO OBTAIN SPECIFIED GEOMETRIC LINEARITY.

THIS SHEET IS PART OF THE DOCUMENT SET LISTED ON SHEET C1 AND SHOULD NOT BE SEPARATED

LAYOUT 09 EQUIPMENT


OPTIMA

 $\mathbb{N}$ 

PROJECT | REVISION 12-24f | 05

DATE: 06.JUN.16 DRAWN BY: CHECKED BY: REK

**REVISION HISTORY:** 

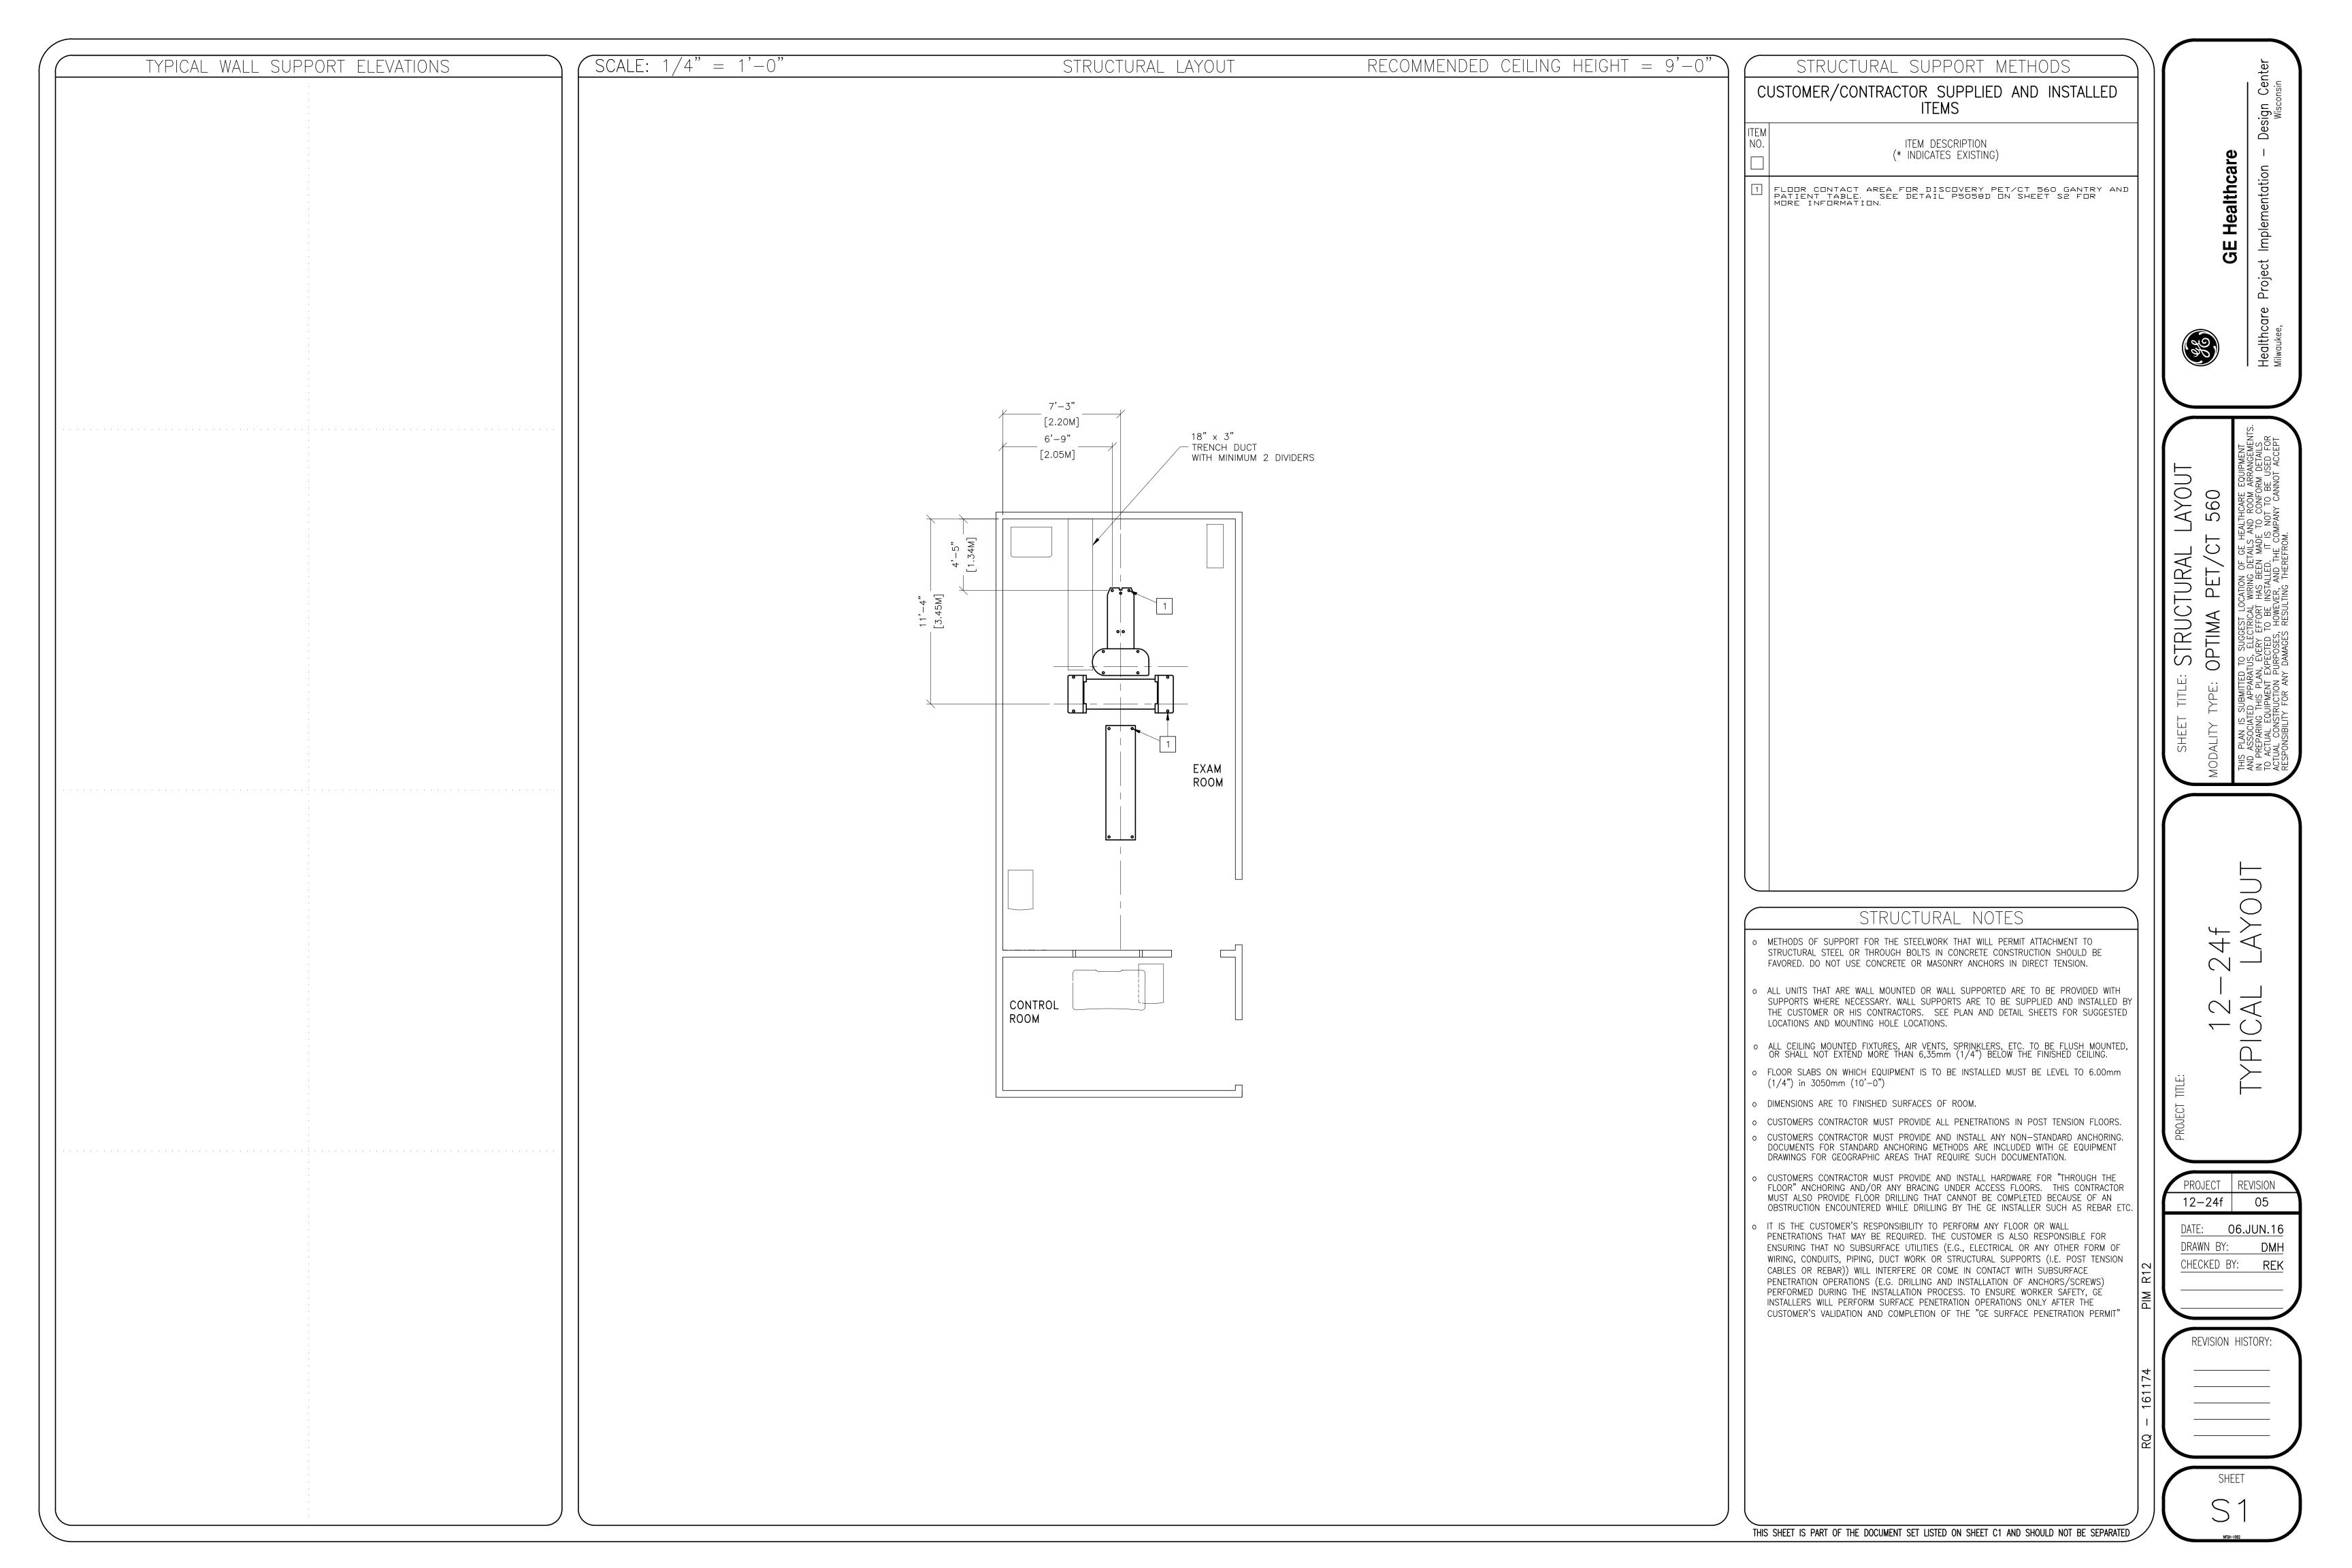

FLOOR MOUNTING DETAIL: PET/CT 560/560FX/610/710 IQ (16 SLICE) INSTALLATION METHODS P5058D WHILE IN THE IMAGING POSITION,
THE EFFECTIVE PET LOAD AREA IS
398 X 645 (15.7 X 25.4) WITH 7
PADS EACH 63.5 (2.5) AS WELL AS
2 PADS THAT DO NOT GET ANCHORED HILTI KWIK-BOLT II 12.7MM (1/2 IN.)

DIAMETER BY 8 IN. (203MM) LONG

PER P/N 2106573 AT SEVEN LEVELING

PADS INTO CONCRETE FLOOR. <sup>-</sup>[630]<sup>-</sup> 5.21"\_ [132] —21.2**"** [538] -.22" [6] HEAT SHIELD THICKNESS 1966 (28 X 77) WITH FOUR ROUND PADS, EACH 63.5 (2.5) IN CONTACT WITH FLOOR. INDIVIDUAL PAD LOADINGS ARE 910 LB., 960 LB., 1040 LB., AND 1090 LB.. —11.8" [300] PET SIDE OF HEAT SHIELD CABLE ACCESS — HILTI KWIK-BOLT II 12.7 MM (1/2 IN.)\_\_\_34.57" [878] DIAMETER BY 203 MM (8 IN.) LONG \_\_\_ PER P/N 2106573 AT FOUR LEVELING PÁDS INTO THE CONCRETE FLOOR. 15.75" [400] CABLE ACCESS \_\_\_15.75" [400] CABLE ACCESS RECTANGULAR BASE 21.7 X 84.0 [550 X 2134] WITH 6 \_\_\_21.66" [550] PADS, EACH 2.5 [63.5] IN CONTACT WITH THE FLOOR 12.7" METHOD OF MOUNTING: HILTI KWIK BOLT II 1/2 [12.7] — DIAMETER BY 8 [203] LONG P/N 2106573 AT FOUR [322.5] LEVELING PADS INTO CONCRETÉ FLOOR WEIGHT/AREA \_64.37" [1635]— \_84.02" [2134]<u>\_\_</u> \_\_\_21.65" [550] \_\_\_6.1" [155] [68] 8.5" [216] TABLE CL [496] 8.5" [216] 1.97" [155] 34.57" [878]——  $[322.5]^{-}$ 1.97" \_79.61" [2022]— TYPICAL ANCHOR ASSEMBLY -2.5" [63.5mm] DIAMETER LEVELING PAD .38" [9.7mm] HEIGHT FOR SHORT 8" ROD 21.2" [538]—— 6.8" [173mm] 1.75" [44.5mm] HEIGHT FOR SHORT 8" ROD FOR LONG 10" ROD 22.86" [581]— [398] 8.17" [208mm] 3.5" FOR LONG 10" ROD \_53.04<mark>"</mark> [1347]—— [89mm] 5.0" [127mm] (MIN.) [102mm] MIN. THICK —81.32**"** [2066]— 1.97" [50] CONCRETE DETAIL NOT TO SCALE

STRUCTURAL OPTIMA PET/CT

96 90

**GE Healthcare** 

 $\mathbb{N}$ 

PROJECT REVISION

12-24f 05


DATE: 06.JUN.16

CHECKED BY: REK

DRAWN BY:

THIS SHEET IS PART OF THE DOCUMENT SET LISTED ON SHEET C1 AND SHOULD NOT BE SEPARATED

**REVISION HISTORY:** 

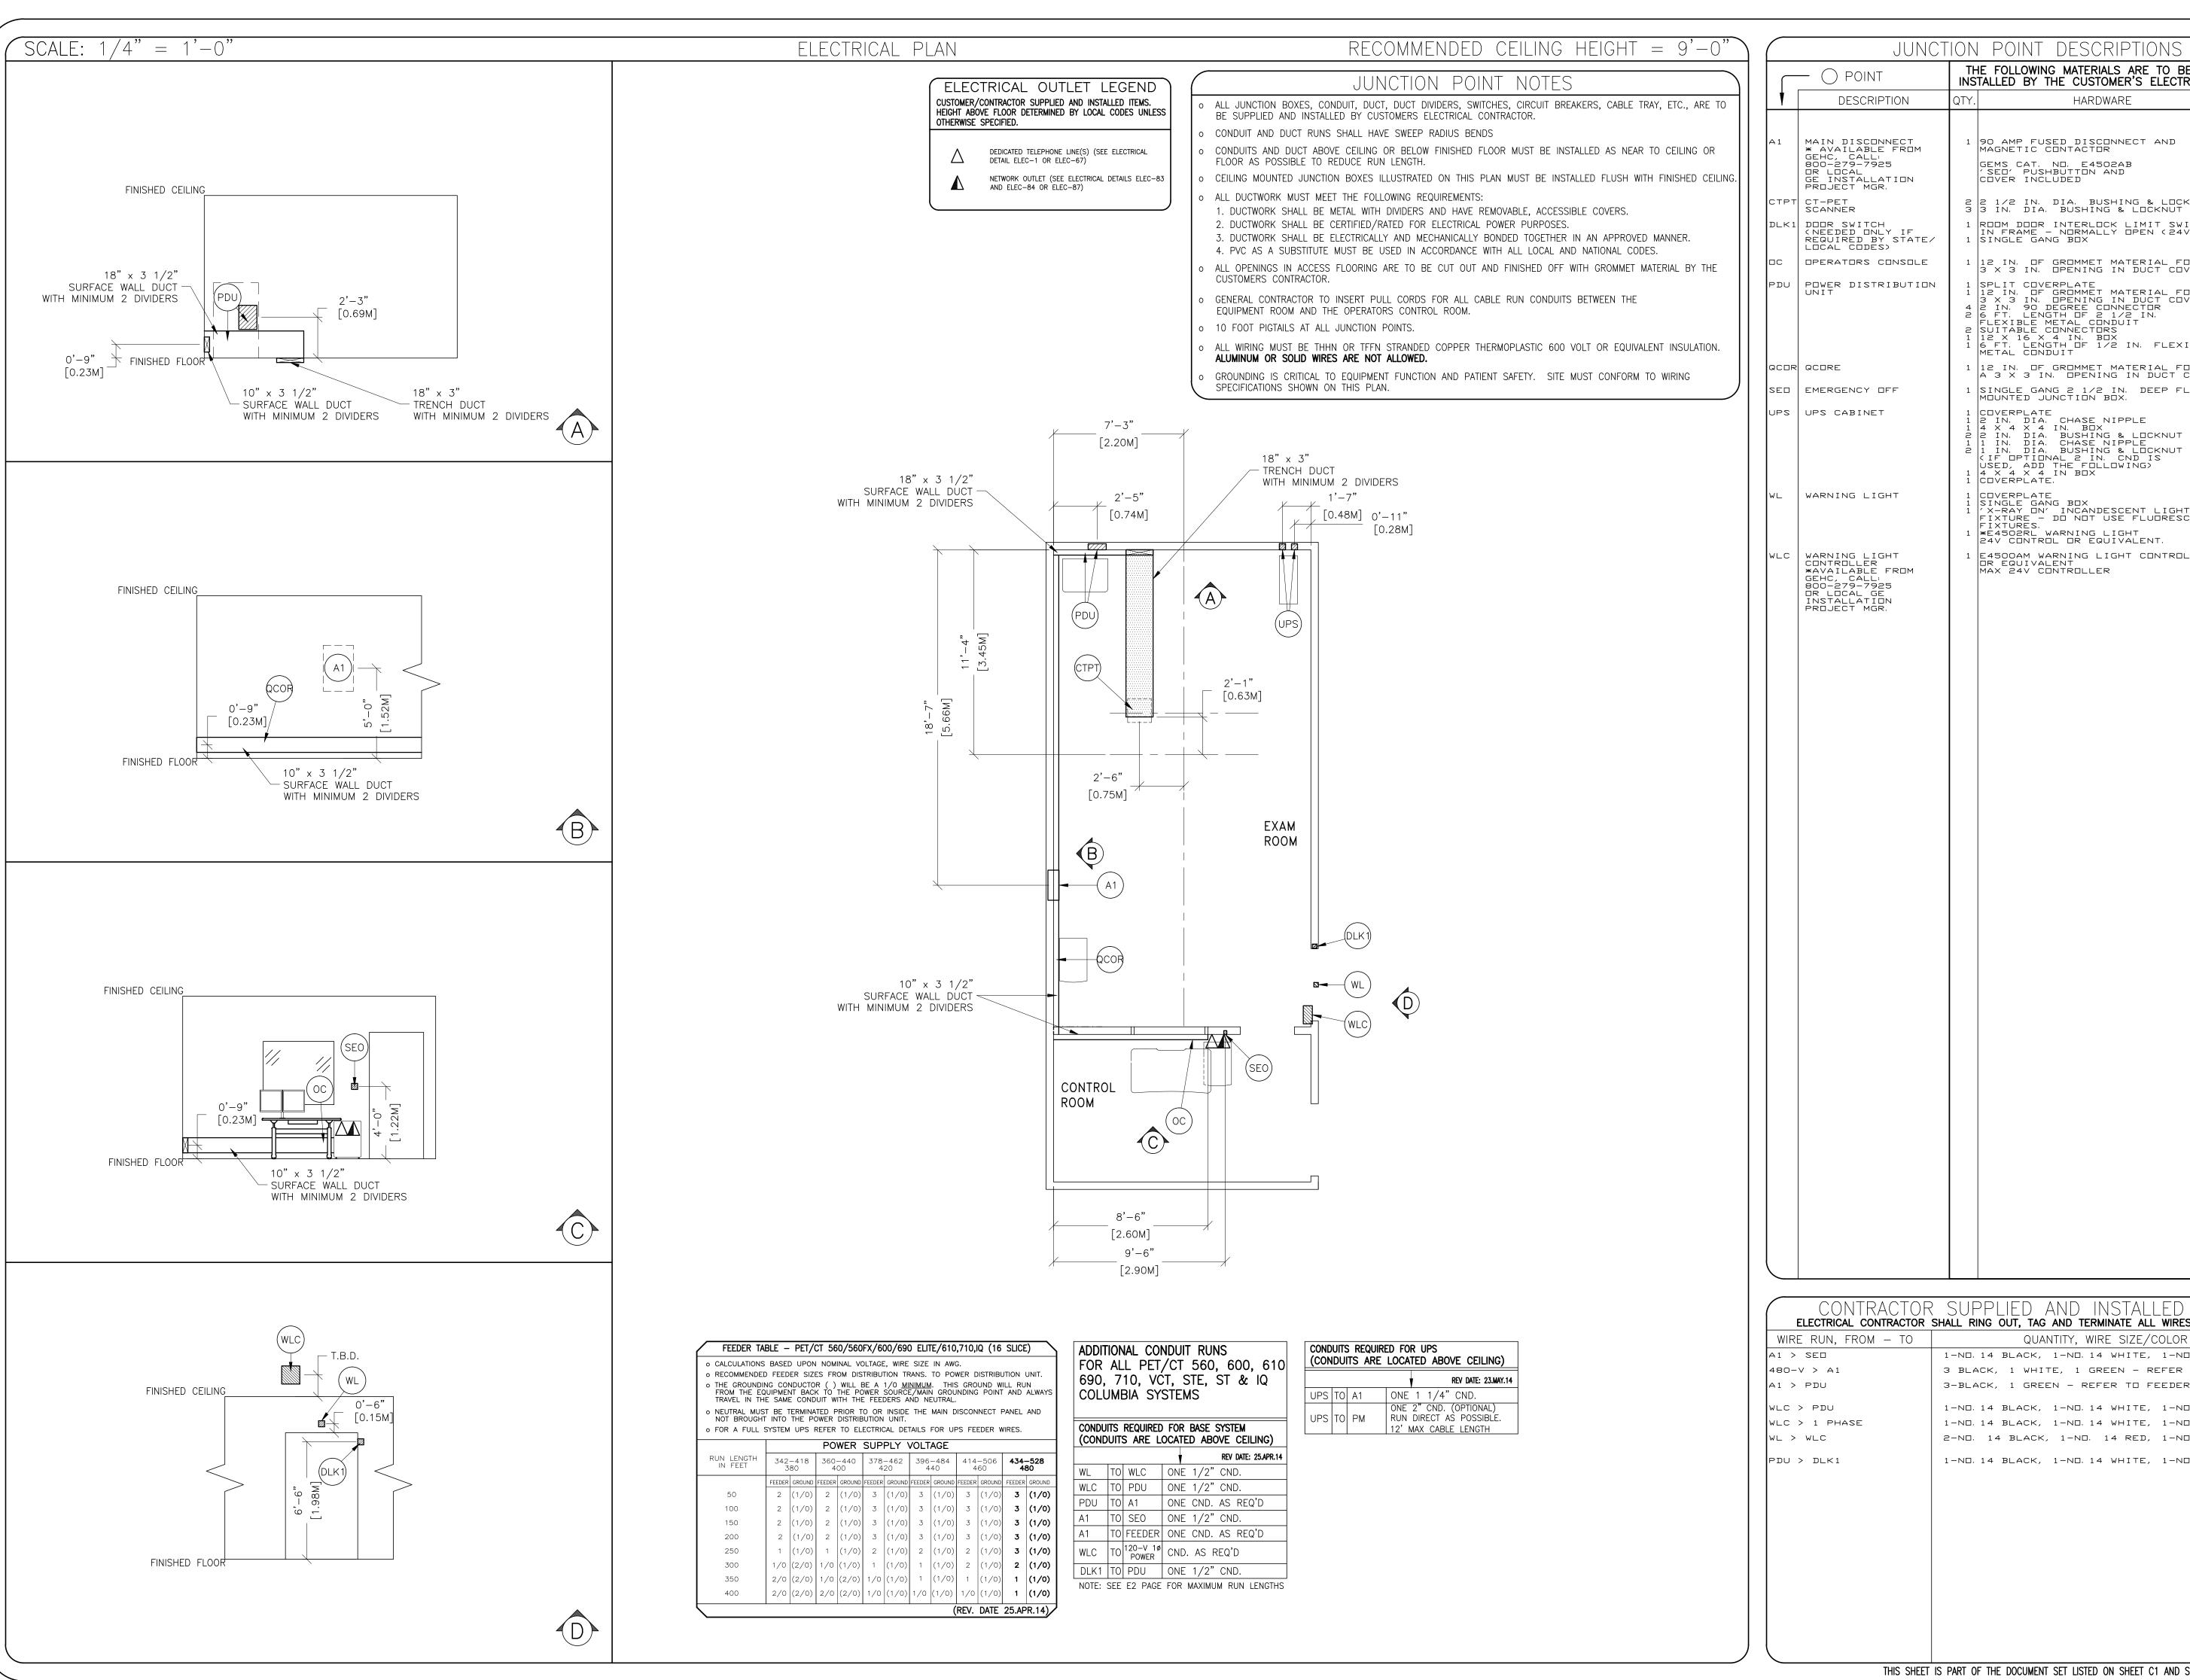

THE FOLLOWING MATERIALS ARE TO BE SUPPLIED AND INSTALLED BY THE CUSTOMER'S ELECTRICAL CONTRACTOR DETAIL NO., SHT. 6 2 2 1/2 IN. DIA. BUSHING & LOCKNUT ELEC-25 3 IN. DIA. BUSHING & LOCKNUT 1 ROOM DOOR INTERLOCK LIMIT SWITCH IN FRAME - NORMALLY OPEN (24V)
1 SINGLE GANG BOX 1 12 IN. OF GROMMET MATERIAL FOR A 3 X 3 IN. OPENING IN DUCT COVER 1 SPLIT COVERPLATE
1 12 IN. OF GROMMET MATERIAL FOR A
3 X 3 IN. OPENING IN DUCT COVER
4 2 IN. 90 DEGREE CONNECTOR
2 6 FT. LENGTH OF 2 1/2 IN.
FLEXIBLE METAL CONDUIT
2 SUITABLE CONNECTORS
1 12 X 16 X 4 IN. BOX
1 6 FT. LENGTH OF 1/2 IN. FLEXIBLE
METAL CONDUIT 1 12 IN. OF GROMMET MATERIAL FOR A 3 X 3 IN. OPENING IN DUCT COVER 1 SINGLE GANG 2 1/2 IN. DEEP FLUSH ELEC-16 MOUNTED JUNCTION BOX. 1 COVERPLATE
2 IN. DIA. CHASE NIPPLE
1 4 X 4 X 4 IN. BOX
2 IN. DIA. BUSHING & LOCKNUT
1 IN. DIA. BUSHING & LOCKNUT
(IF OPTIONAL 2 IN. CND IS
USED, ADD THE FOLLOWING)
1 4 X 4 X 4 IN BOX
1 COVERPLATE. ELEC-8 | CUVERPLATE | SINGLE GANG BOX | YX-RAY ON' INCANDESCENT LIGHT | FIXTURE - DO NOT USE FLUORESCENT | FIXTURES. 1 E4500AM WARNING LIGHT CONTROL OR EQUIVALENT MAX 24V CONTROLLER ELEC-17

CONTRACTOR SUPPLIED AND INSTALLED WIRING ELECTRICAL CONTRACTOR SHALL RING OUT, TAG AND TERMINATE ALL WIRES AT BOTH ENDS.

1-NO.14 BLACK, 1-NO.14 WHITE, 1-NO.14 GREEN 3 BLACK, 1 WHITE, 1 GREEN - REFER TO FEEDER TABLE 3-BLACK, 1 GREEN - REFER TO FEEDER TABLE 1-ND, 14 BLACK, 1-ND, 14 WHITE, 1-ND, 14 GREEN

1-ND, 14 BLACK, 1-ND, 14 WHITE, 1-ND, 14 GREEN 2-NO. 14 BLACK, 1-NO. 14 RED, 1-NO. 14 WHITE

1-NO.14 BLACK, 1-NO.14 WHITE, 1-NO.14 GREEN

REVISION HISTORY

ign Wisc

AYOU<sup>-</sup> 560

TRICAL

CT

OPTIMA

 $\mathbb{N}$ 

PROJECT REVISION

12-24f | 05


DATE: 06.JUN.16

CHECKED BY: REK

DRAWN BY:

CAL ORT ORT SEE

THIS SHEET IS PART OF THE DOCUMENT SET LISTED ON SHEET C1 AND SHOULD NOT BE SEPARATED

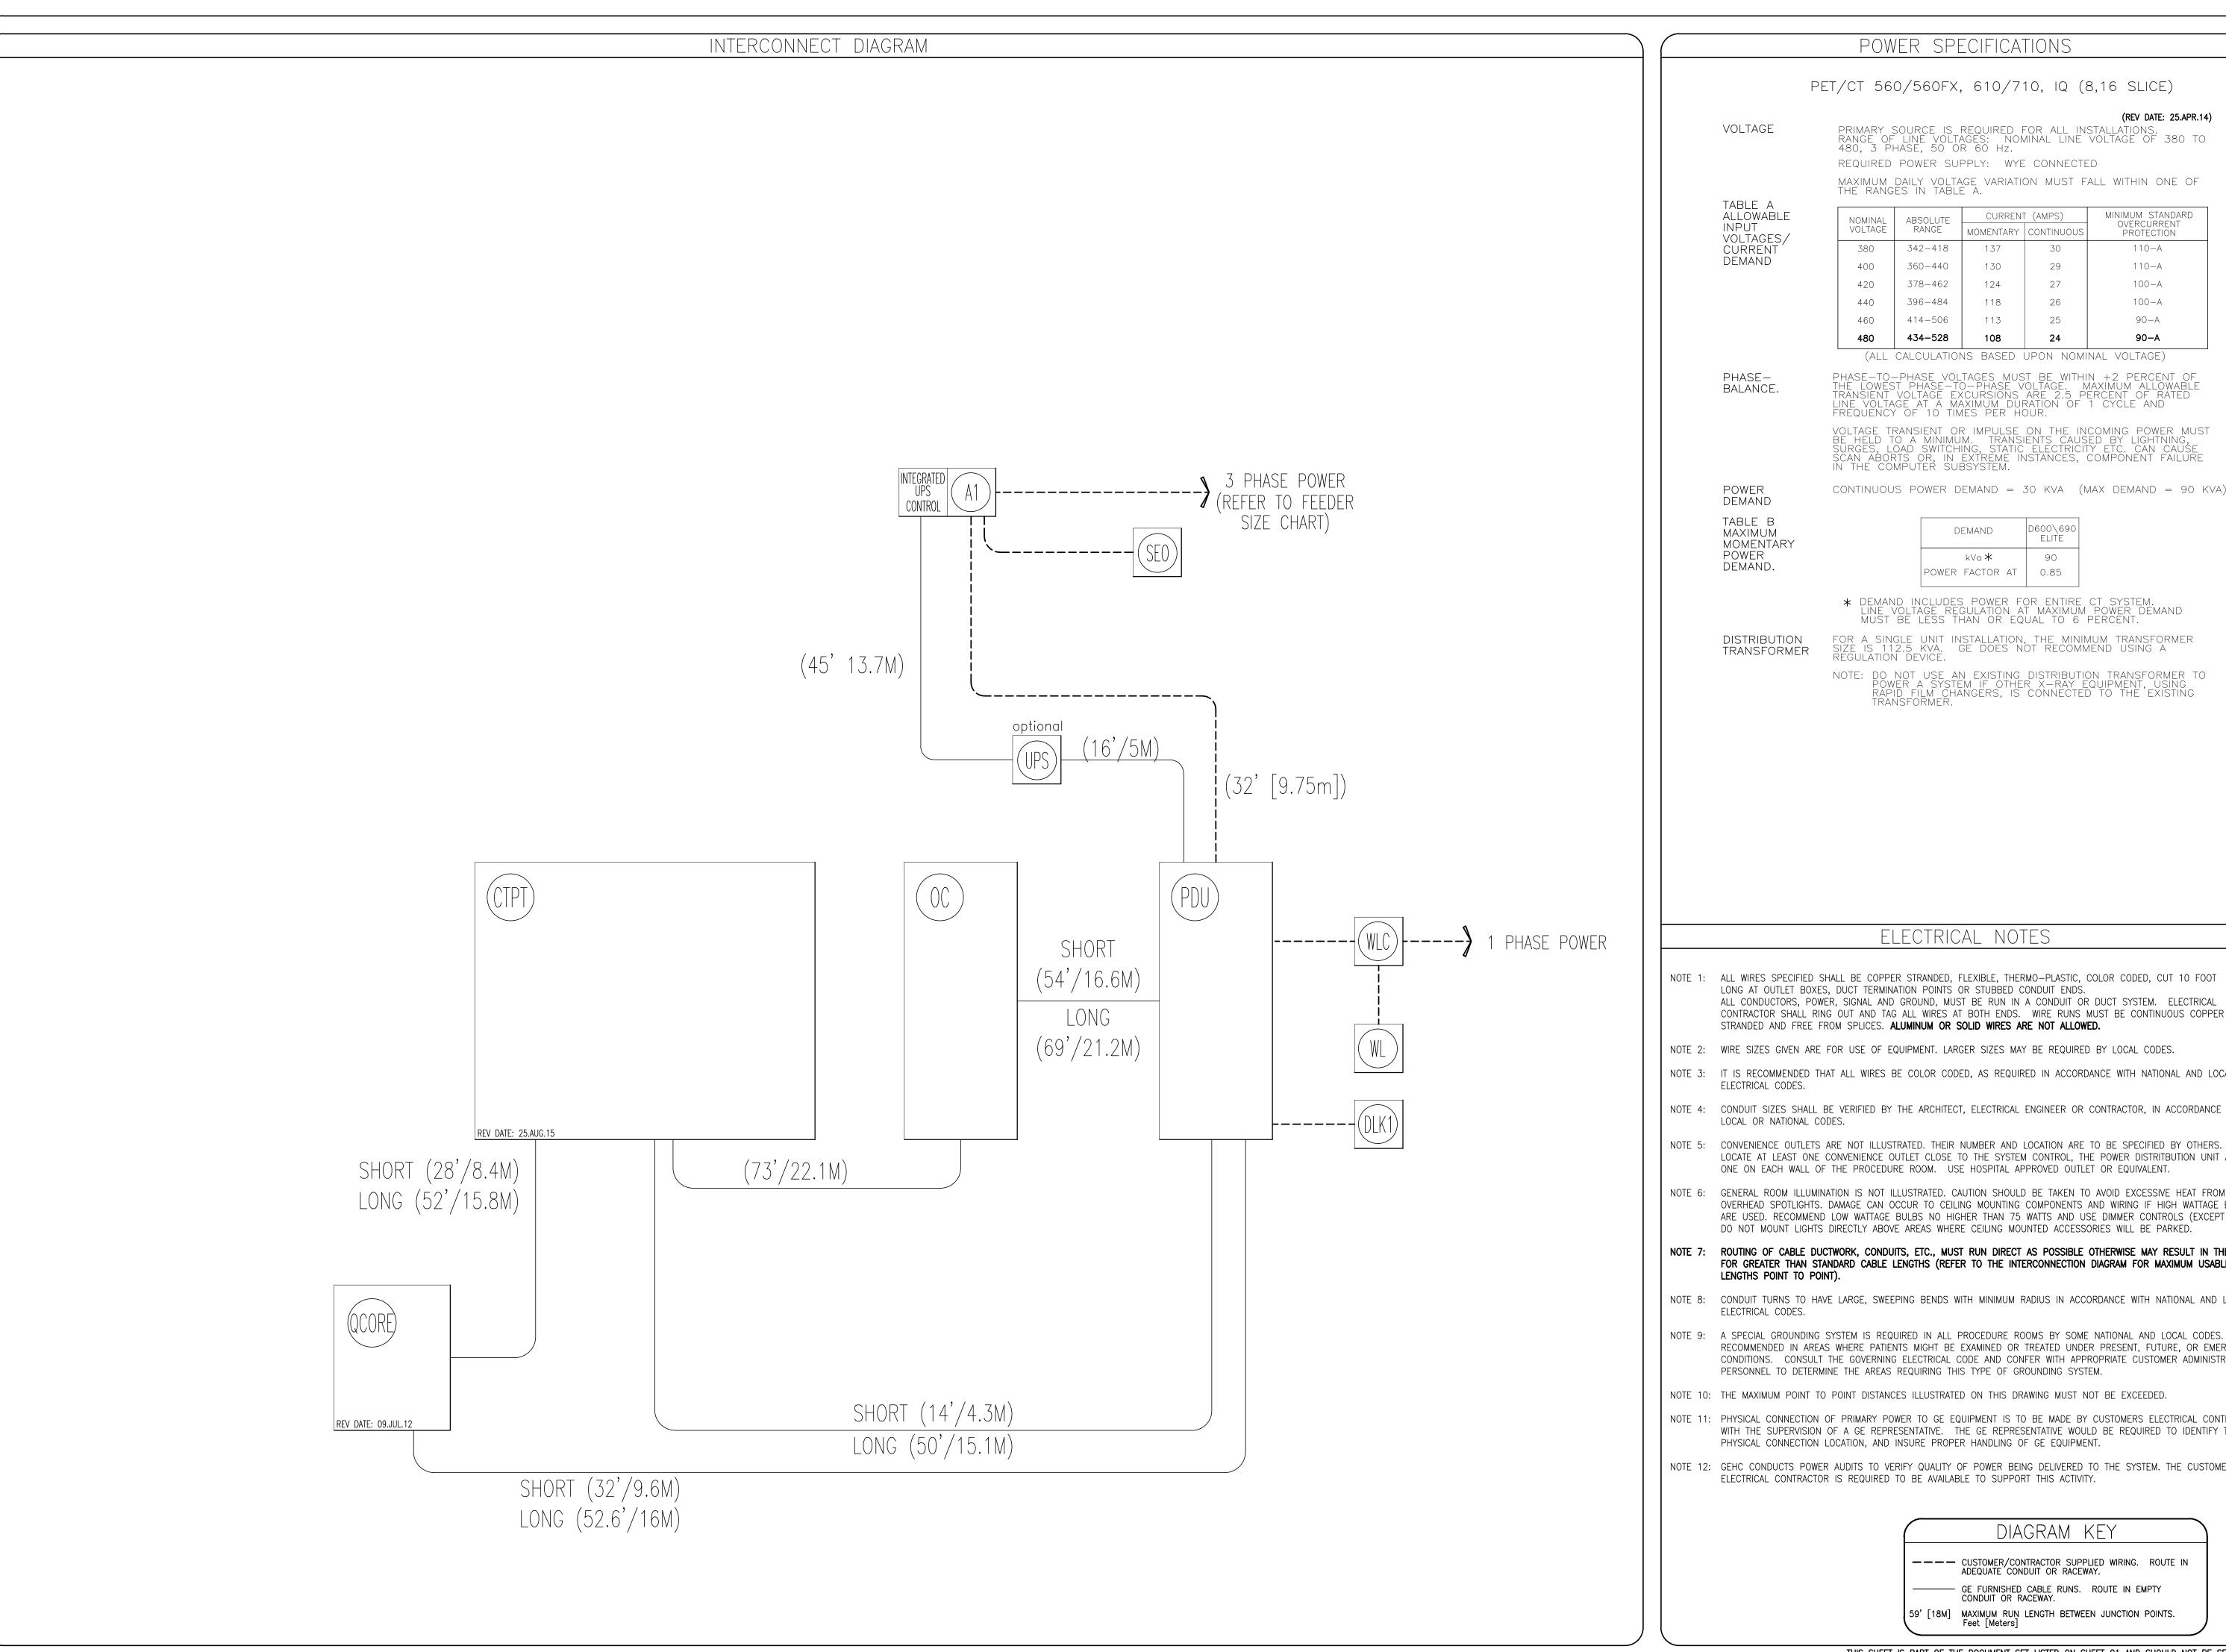

POWER SPECIFICATIONS

PET/CT 560/560FX, 610/710, IQ (8,16 SLICE)

(REV DATE: 25.APR.14)

PRIMARY SOURCE IS REQUIRED FOR ALL INSTALLATIONS.
RANGE OF LINE VOLTAGES: NOMINAL LINE VOLTAGE OF 380 TO
480, 3 PHASE, 50 OR 60 Hz. REQUIRED POWER SUPPLY: WYE CONNECTED

MAXIMUM DAILY VOLTAGE VARIATION MUST FALL WITHIN ONE OF THE RANGES IN TABLE A.

NOMINAI	ABSOLUTE	CURREN <sup>-</sup>	Γ (AMPS)	MINIMUM STANDARD
VOLTAGE	RANGE	MOMENTARY	CONTINUOUS	OVERCURRENT PROTECTION
380	342-418	137	30	110-A
400	360-440	130	29	110-A
420	378-462	124	27	100-A
440	396-484	118	26	100-A
460	414-506	113	25	90-A
480	434-528	108	24	90 <b>–</b> A

(ALL CALCULATIONS BASED UPON NOMINAL VOLTAGE)

PHASE—TO—PHASE VOLTAGES MUST BE WITHIN +2 PERCENT OF THE LOWEST PHASE—TO—PHASE VOLTAGE. MAXIMUM ALLOWABLE TRANSIENT VOLTAGE EXCURSIONS ARE 2.5 PERCENT OF RATED LINE VOLTAGE AT A MAXIMUM DURATION OF 1 CYCLE AND FREQUENCY OF 10 TIMES PER HOUR.

VOLTAGE TRANSIENT OR IMPULSE ON THE INCOMING POWER MUST BE HELD TO A MINIMUM. TRANSIENTS CAUSED BY LIGHTNING, SURGES, LOAD SWITCHING, STATIC ELECTRICITY ETC. CAN CAUSE SCAN ABORTS OR, IN EXTREME INSTANCES, COMPONENT FAILURE IN THE COMPUTER SUBSYSTEM.

CONTINUOUS POWER DEMAND = 30 KVA (MAX DEMAND = 90 KVA)

DEMAND	D600\690 ELITE
kVa *	90
POWER FACTOR AT	0.85

\* DEMAND INCLUDES POWER FOR ENTIRE CT SYSTEM. Line voltage regulation at maximum power demand must be less than or equal to 6 percent.

FOR A SINGLE UNIT INSTALLATION, THE MINIMUM TRANSFORMER SIZE IS 112.5 KVA. GE DOES NOT RECOMMEND USING A REGULATION DEVICE.

DO NOT USE AN EXISTING DISTRIBUTION TRANSFORMER TO POWER A SYSTEM IF OTHER X—RAY EQUIPMENT, USING RAPID FILM CHANGERS, IS CONNECTED TO THE EXISTING

#### ELECTRICAL NOTES

- NOTE 1: ALL WIRES SPECIFIED SHALL BE COPPER STRANDED, FLEXIBLE, THERMO-PLASTIC, COLOR CODED, CUT 10 FOOT LONG AT OUTLET BOXES, DUCT TERMINATION POINTS OR STUBBED CONDUIT ENDS. ALL CONDUCTORS, POWER, SIGNAL AND GROUND, MUST BE RUN IN A CONDUIT OR DUCT SYSTEM. ELECTRICAL CONTRACTOR SHALL RING OUT AND TAG ALL WIRES AT BOTH ENDS. WIRE RUNS MUST BE CONTINUOUS COPPER STRANDED AND FREE FROM SPLICES. ALUMINUM OR SOLID WIRES ARE NOT ALLOWED.
- NOTE 2: WIRE SIZES GIVEN ARE FOR USE OF EQUIPMENT. LARGER SIZES MAY BE REQUIRED BY LOCAL CODES.
- NOTE 3: IT IS RECOMMENDED THAT ALL WIRES BE COLOR CODED, AS REQUIRED IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES.
- NOTE 4: CONDUIT SIZES SHALL BE VERIFIED BY THE ARCHITECT, ELECTRICAL ENGINEER OR CONTRACTOR, IN ACCORDANCE WITH LOCAL OR NATIONAL CODES.
- LOCATE AT LEAST ONE CONVENIENCE OUTLET CLOSE TO THE SYSTEM CONTROL, THE POWER DISTRITBUTION UNIT AND ONE ON EACH WALL OF THE PROCEDURE ROOM. USE HOSPITAL APPROVED OUTLET OR EQUIVALENT.
- NOTE 6: GENERAL ROOM ILLUMINATION IS NOT ILLUSTRATED. CAUTION SHOULD BE TAKEN TO AVOID EXCESSIVE HEAT FROM OVERHEAD SPOTLIGHTS. DAMAGE CAN OCCUR TO CEILING MOUNTING COMPONENTS AND WIRING IF HIGH WATTAGE BULBS ARE USED. RECOMMEND LOW WATTAGE BULBS NO HIGHER THAN 75 WATTS AND USE DIMMER CONTROLS (EXCEPT MR). DO NOT MOUNT LIGHTS DIRECTLY ABOVE AREAS WHERE CEILING MOUNTED ACCESSORIES WILL BE PARKED.
- NOTE 7: ROUTING OF CABLE DUCTWORK, CONDUITS, ETC., MUST RUN DIRECT AS POSSIBLE OTHERWISE MAY RESULT IN THE NEED FOR GREATER THAN STANDARD CABLE LENGTHS (REFER TO THE INTERCONNECTION DIAGRAM FOR MAXIMUM USABLE LENGTHS POINT TO POINT).
- NOTE 8: CONDUIT TURNS TO HAVE LARGE, SWEEPING BENDS WITH MINIMUM RADIUS IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES.
- NOTE 9: A SPECIAL GROUNDING SYSTEM IS REQUIRED IN ALL PROCEDURE ROOMS BY SOME NATIONAL AND LOCAL CODES. IT IS RECOMMENDED IN AREAS WHERE PATIENTS MIGHT BE EXAMINED OR TREATED UNDER PRESENT, FUTURE, OR EMERGENCY CONDITIONS. CONSULT THE GOVERNING ELECTRICAL CODE AND CONFER WITH APPROPRIATE CUSTOMER ADMINISTRATIVE PERSONNEL TO DETERMINE THE AREAS REQUIRING THIS TYPE OF GROUNDING SYSTEM.
- NOTE 10: THE MAXIMUM POINT TO POINT DISTANCES ILLUSTRATED ON THIS DRAWING MUST NOT BE EXCEEDED.
- NOTE 11: PHYSICAL CONNECTION OF PRIMARY POWER TO GE EQUIPMENT IS TO BE MADE BY CUSTOMERS ELECTRICAL CONTRACTOR WITH THE SUPERVISION OF A GE REPRESENTATIVE. THE GE REPRESENTATIVE WOULD BE REQUIRED TO IDENTIFY THE PHYSICAL CONNECTION LOCATION, AND INSURE PROPER HANDLING OF GE EQUIPMENT.
- NOTE 12: GEHC CONDUCTS POWER AUDITS TO VERIFY QUALITY OF POWER BEING DELIVERED TO THE SYSTEM. THE CUSTOMER'S ELECTRICAL CONTRACTOR IS REQUIRED TO BE AVAILABLE TO SUPPORT THIS ACTIVITY.

DIAGRAM KEY

———— CUSTOMER/CONTRACTOR SUPPLIED WIRING. ROUTE IN ADEQUATE CONDUIT OR RACEWAY. GE FURNISHED CABLE RUNS. ROUTE IN EMPTY CONDUIT OR RACEWAY.

59' [18M] MAXIMUM RUN LENGTH BETWEEN JUNCTION POINTS. Feet [Meters]

THIS SHEET IS PART OF THE DOCUMENT SET LISTED ON SHEET C1 AND SHOULD NOT BE SEPARATED

SPECIFICATIONS ELECTRICAL OPTIMA

260

sign Wisco

Healthcare


 $\mathbb{N}$ 


PROJECT REVISION

12-24f 05 DATE: **06.JUN.16** 

DRAWN BY: CHECKED BY: REK

**REVISION HISTORY:** 

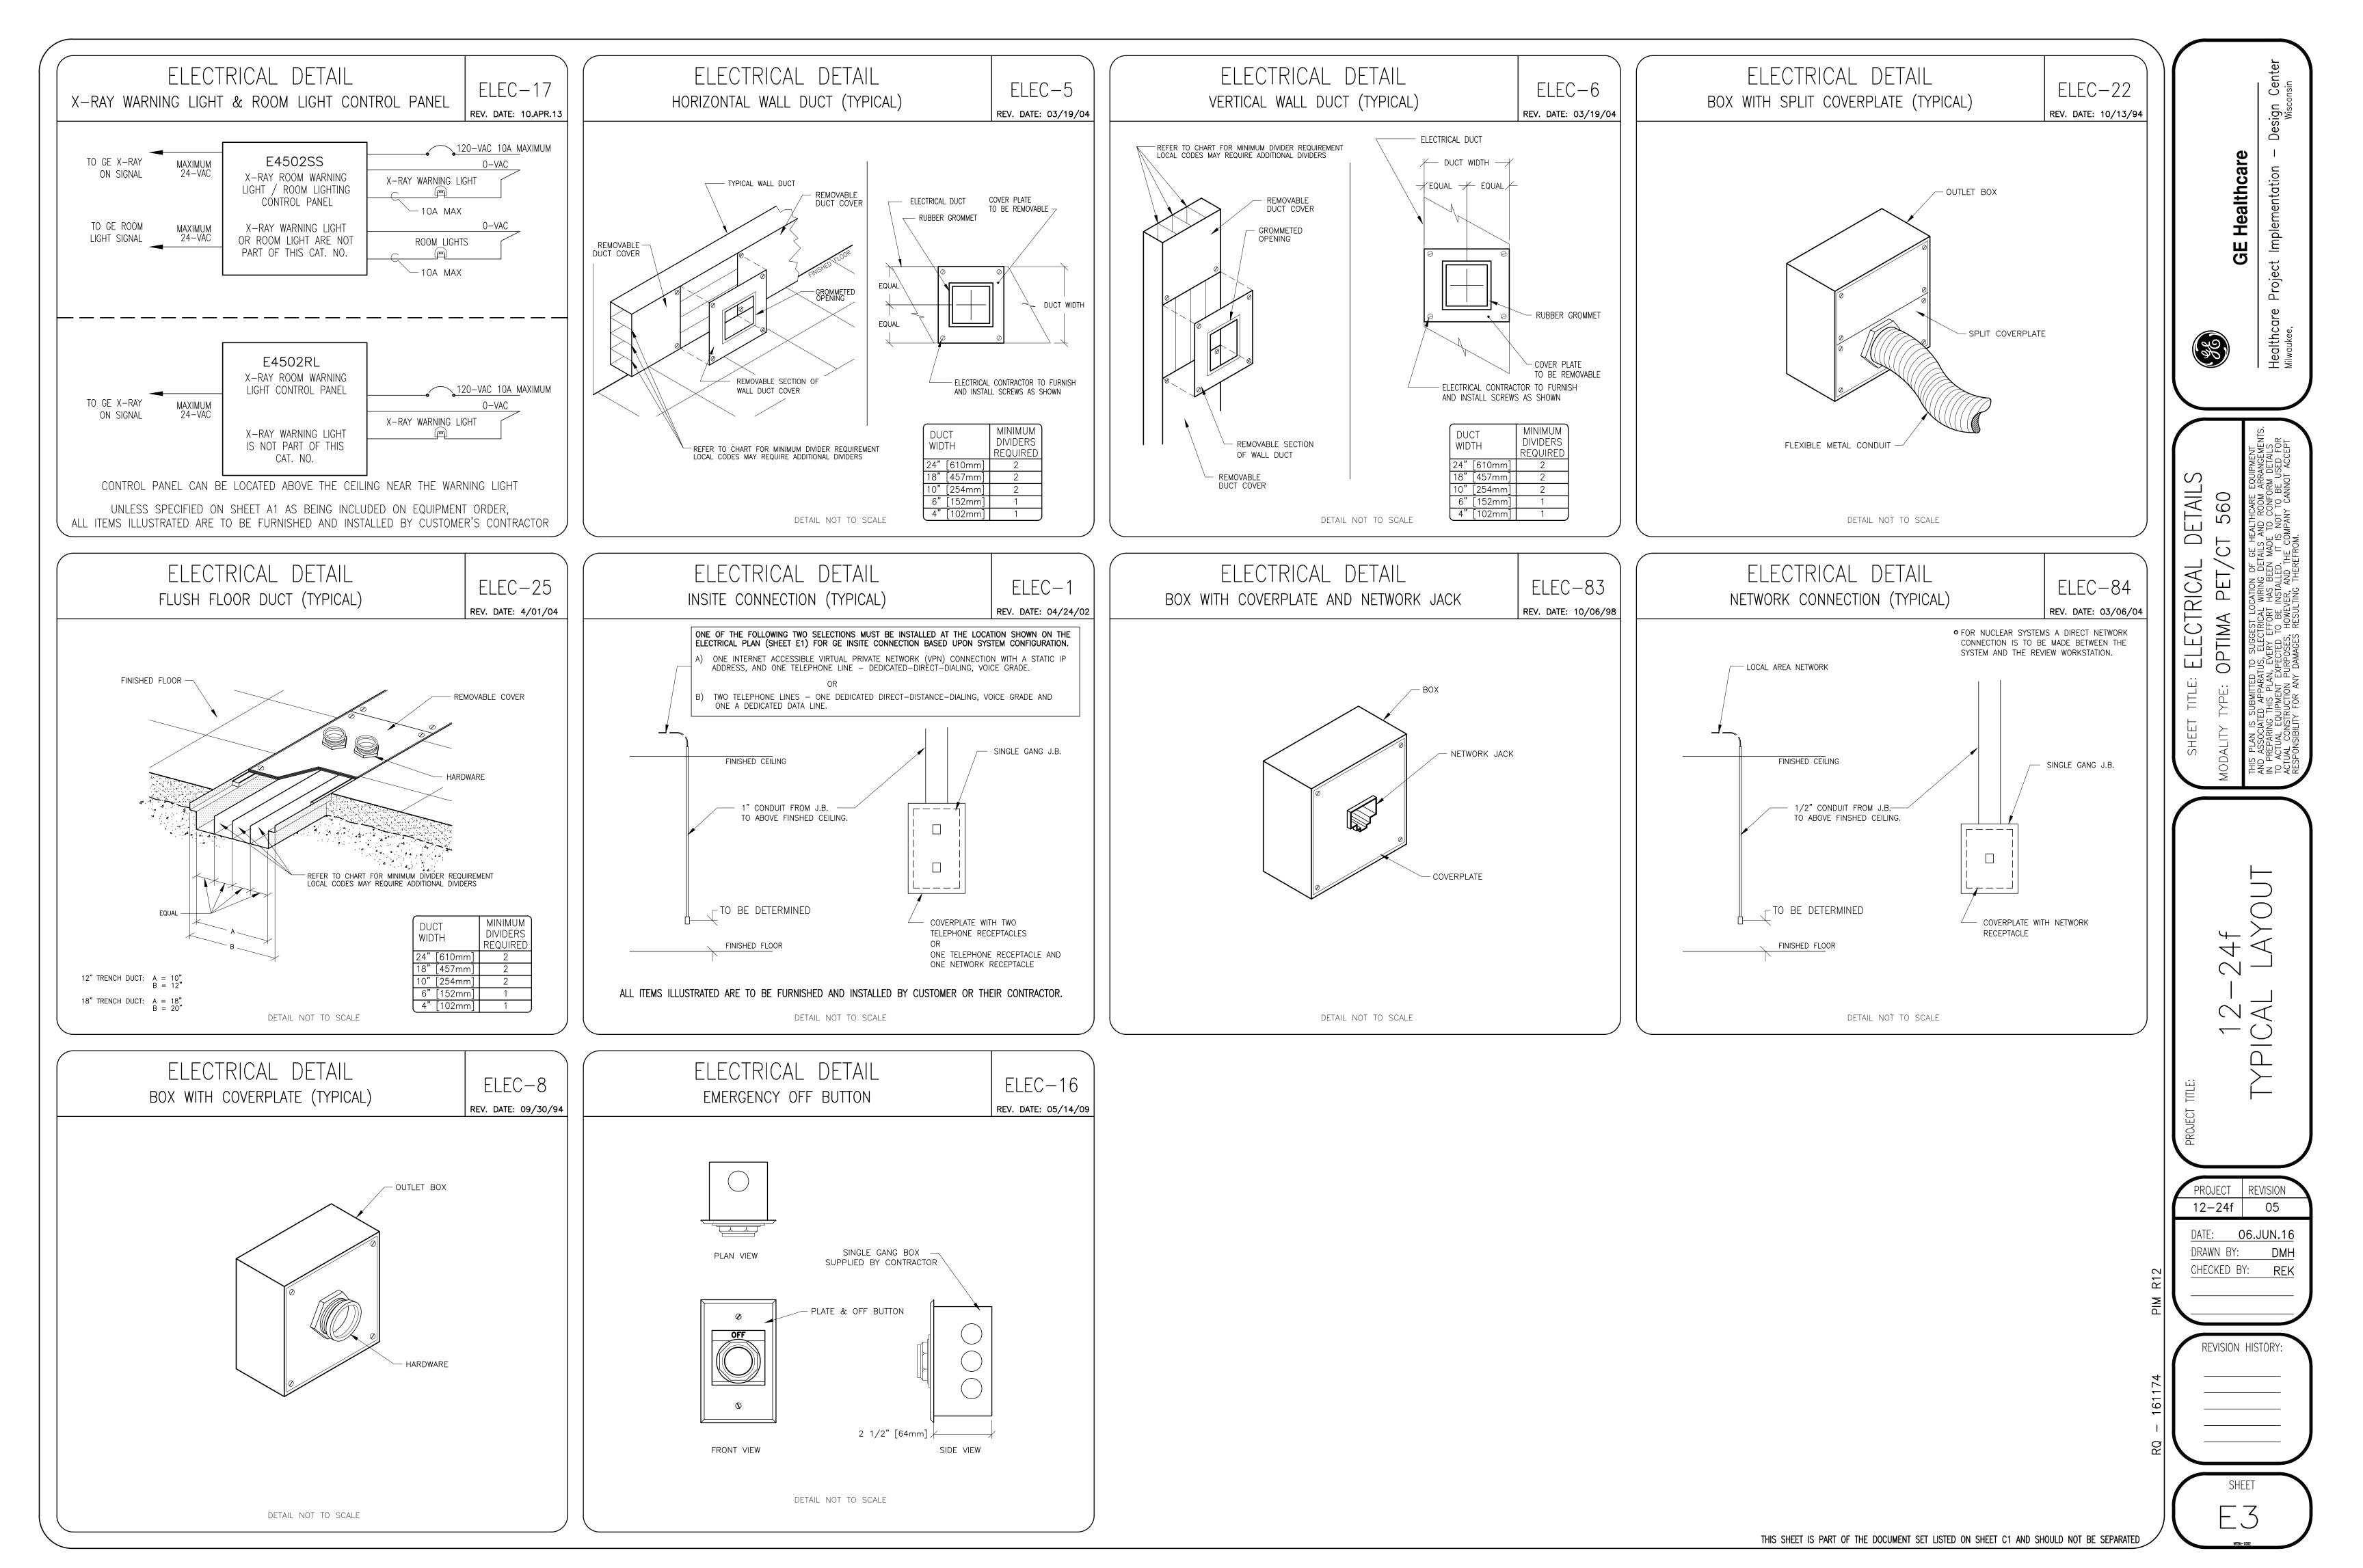

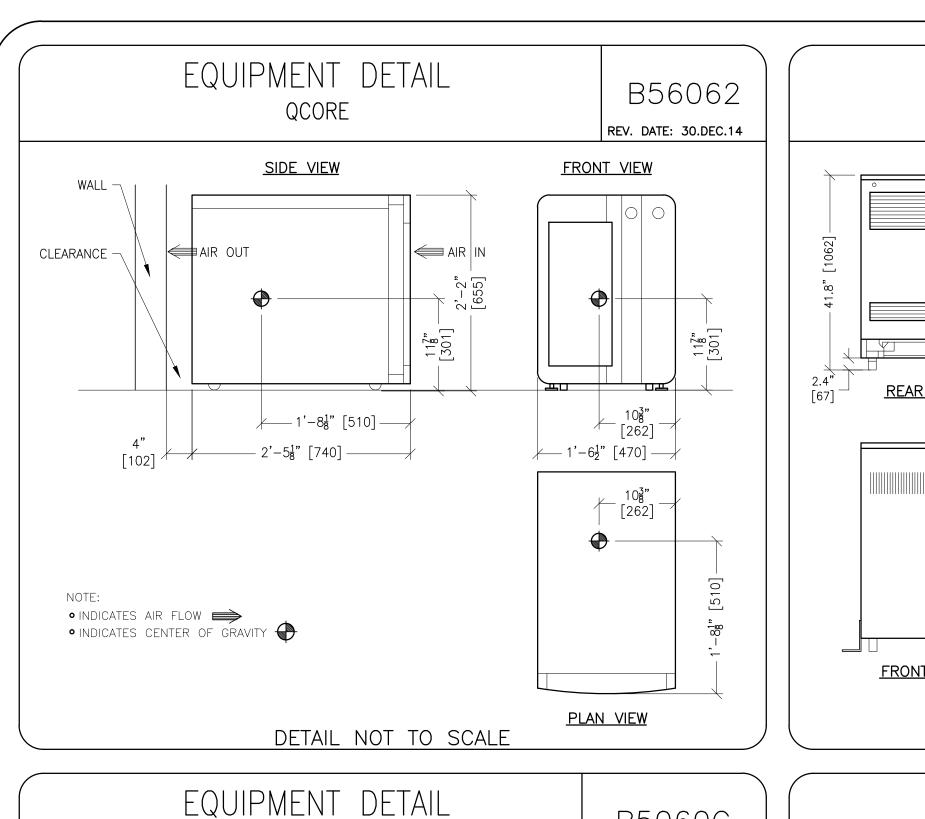

EQUIPMENT SHIPPING DETAIL

25 [635]

25 [635]

36 [914]

LENGTH — IN. [MM]

34 [864]

34 [864]

36 [914]

CONFIGURATION

SKID WITH Q.CORE

SKID WITH CONSOLI

& COMPONENTS

ANNULUS PHANTOM

B5060C

REV. DATE: 10.Apr.14

WEIGHT - Ib [kg]

192 [87]

192 [87]


480 [217]


HEIGHT - IN. [MM]

42 [1067]

42 [1067]

36 [1914]

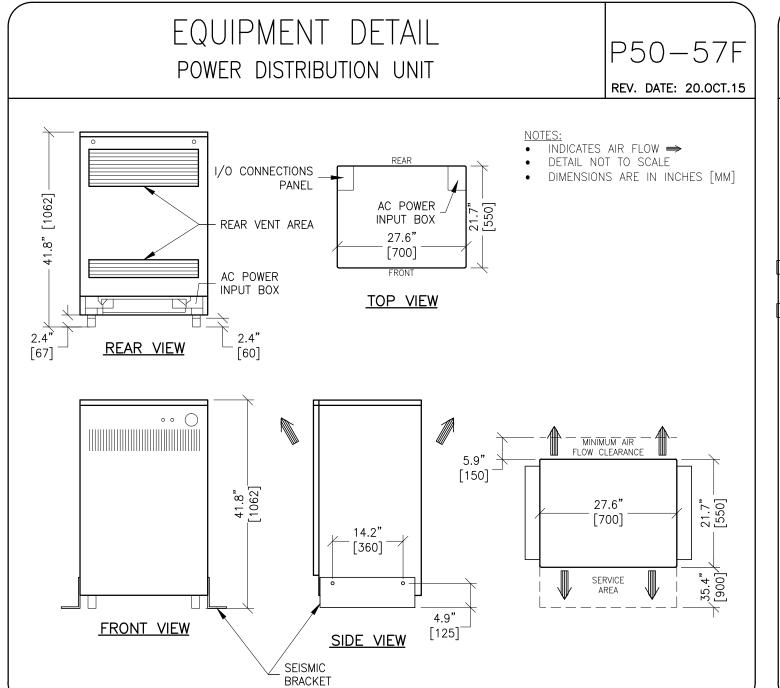

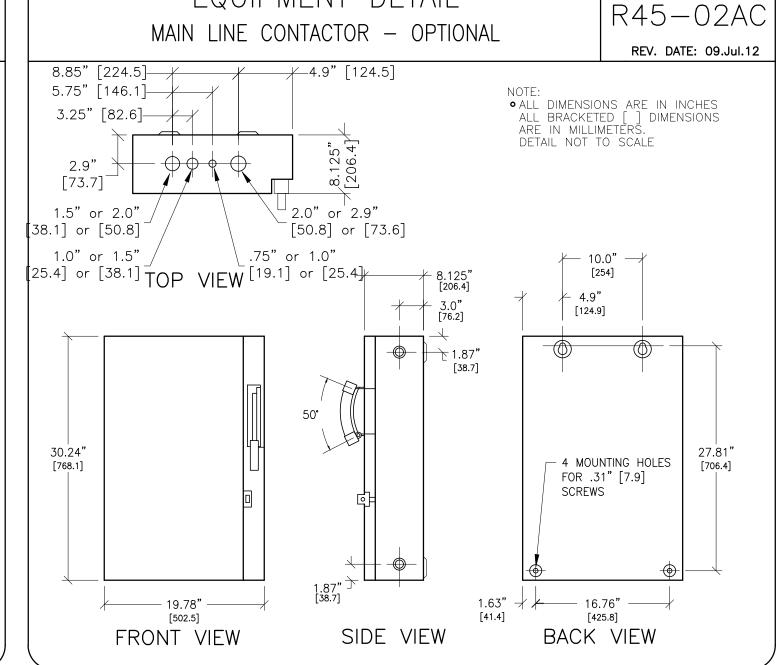

EQUIPMENT DETAIL

STORAGE CABINET CHART

EQUIPMENT DETAIL



B5060A


B610E


REV. DATE: 27.AUG.12

HEAD PHANTOM

LARGE FILTER (16 SLICE)


EQUIPMENT DETAIL

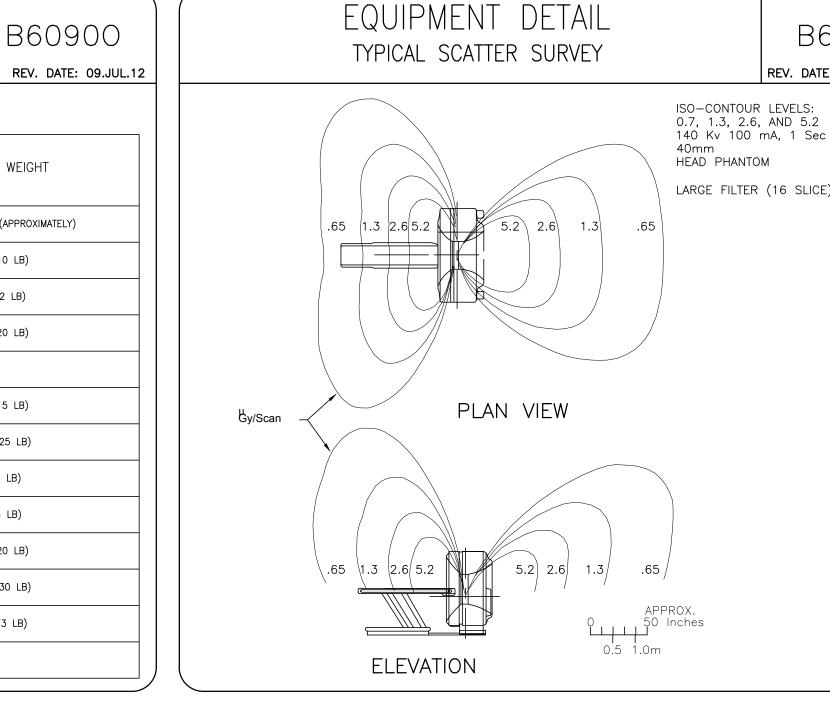


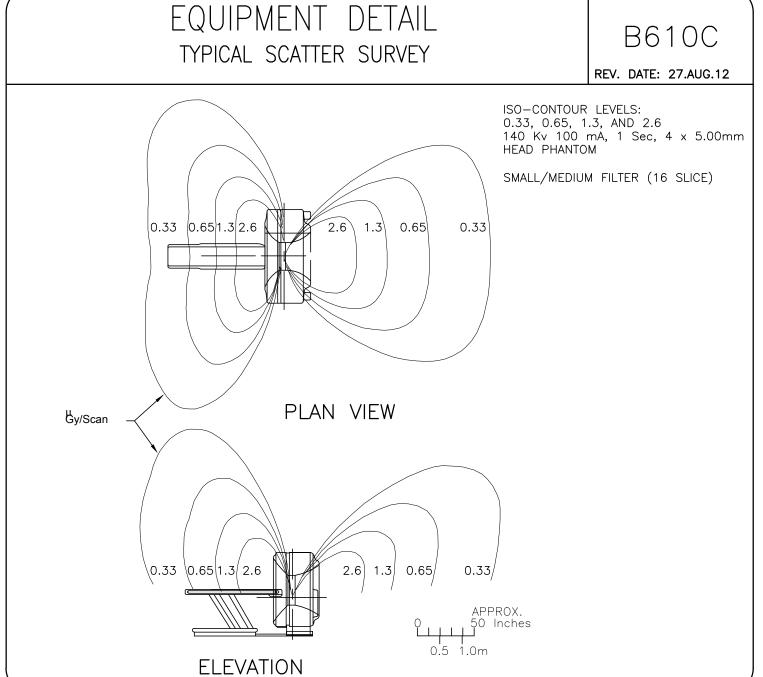



EQUIPMENT DETAIL


ITEM	SIZE	WEIGHT
STORAGE CABINET	46 X 91 X 107 CM (18" D X 36" W X 42" H)	45.3 KG (100 LB) (APPROXIMATELY)
QA PHANTOM (WATER FILLED)	23 X 15 CM (9" X 6")	4.5 KG (10 LB)
PET PHANTOM (VCQ)	45 X 35 X 20 CM (18" X 14" X 8")	0.9 KG (2 LB)
PHANTOM HOLDER	25 X 25 CM (10" X 10")	9.1 KG (20 LB)
FE DOCUMENTS & CD/DVD		
35 CM POLY (CIRCLE)	35 X 8 CM (14" X 3")	6.8 KG (15 LB)
48 CM POLY (CIRCLE)	48 X 8 CM (19" X 3")	11.3 KG (25 LB)
ST00L	48 X 48 CM (19"H X 19"H)	1 KG (2 LB)
BLUE TOTE	81 X 51 X 32 CM (30" X 20'F X 17")	2 KG (4 LB)
INSTALL SUPPORT KIT (BOX)	30 X 30 X 38 CM (12" X 12" X 15")	9.1 KG (20 LB)
TUBE HOIST KIT	77 X 8 CM AND 38 X 15 CM (30" X 3" AND 15" X 6")	13.6 KG (30 LB)
BALANCE WEIGHT KIT	(2 BOXES)	33 KG (73 LB)
SPATIAL RESOLUTION PHANTOM	18 X 15 X 8 CM (7" X 6" X 3")	_

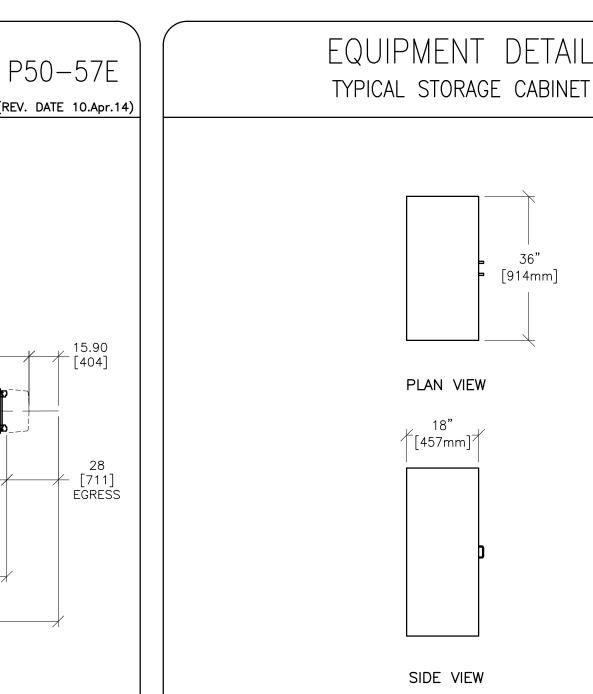

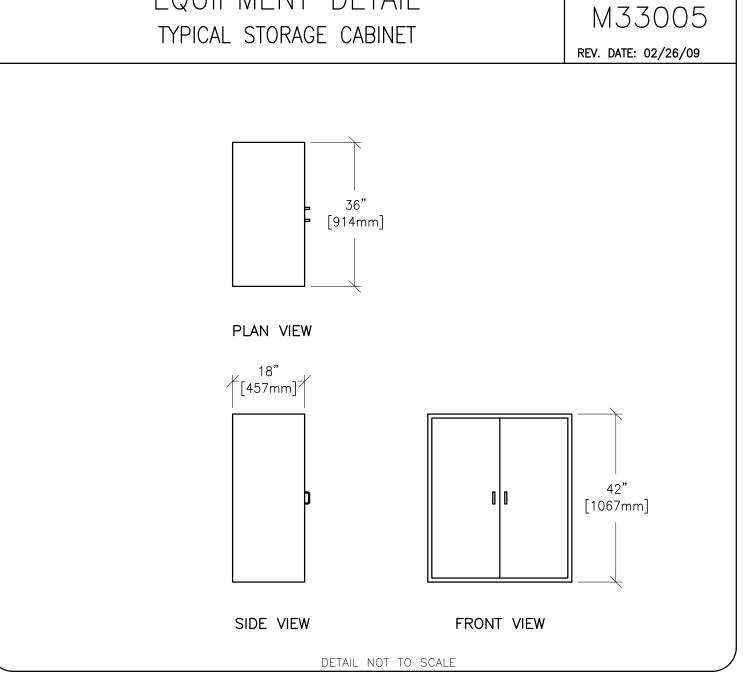

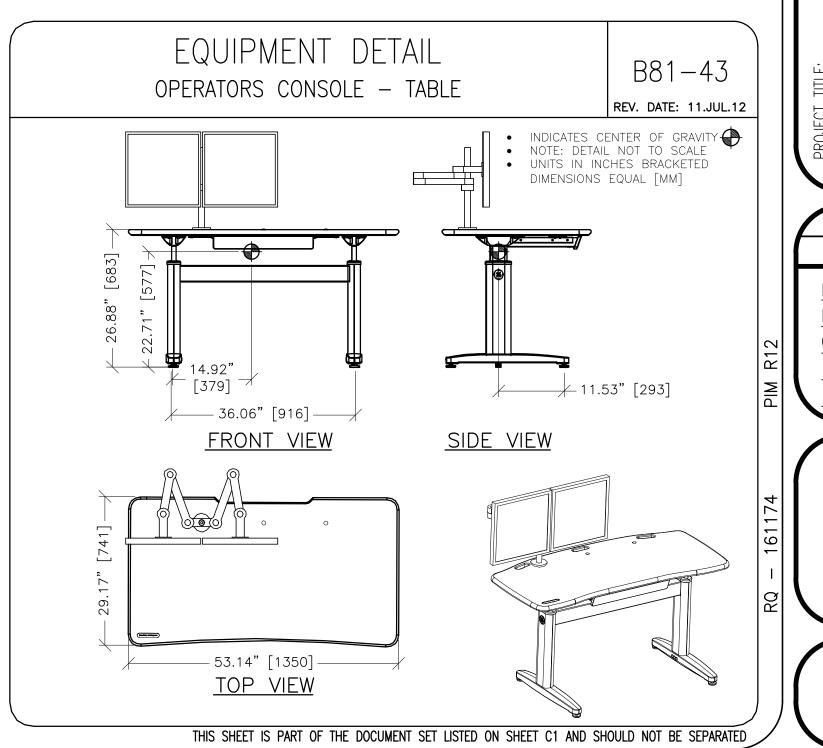

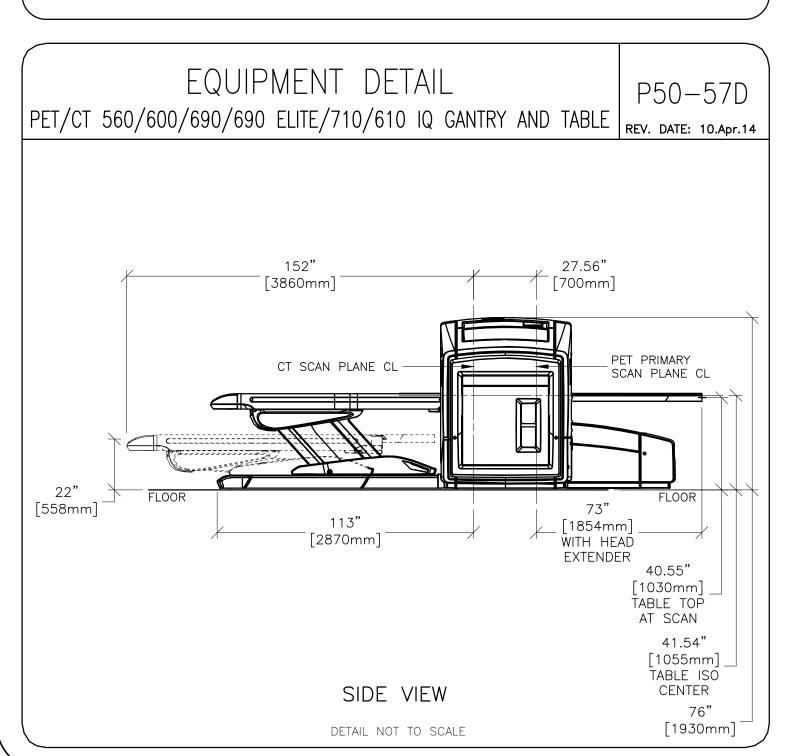

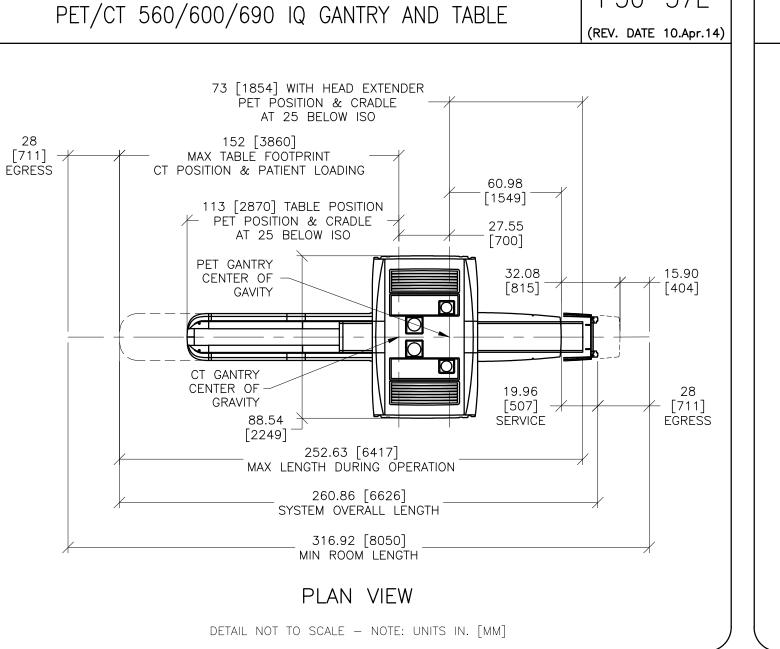

DETAIL: ST 560 CT SUBMITTED TO SUGGEST LOCATION OF GIED APPARATUS, ELECTRICAL WIRING DETAIL THIS PLAN, EVERY EFFORT HAS BEEN MULPMENT EXPECTED TO BE INSTALLED. IRUCTION PURPOSES, HOWEVER, AND THE Y FOR ANY DAMAGES RESULTING THEREFE EQUIPMENT OPTIMA


ign

Healthcare

999

 $abla \overline{\triangleleft}$ YPIC, DRAWN BY:

PROJECT REVISION 12-24f 05 DATE: **06.JUN.16** CHECKED BY: REK REVISION HISTORY

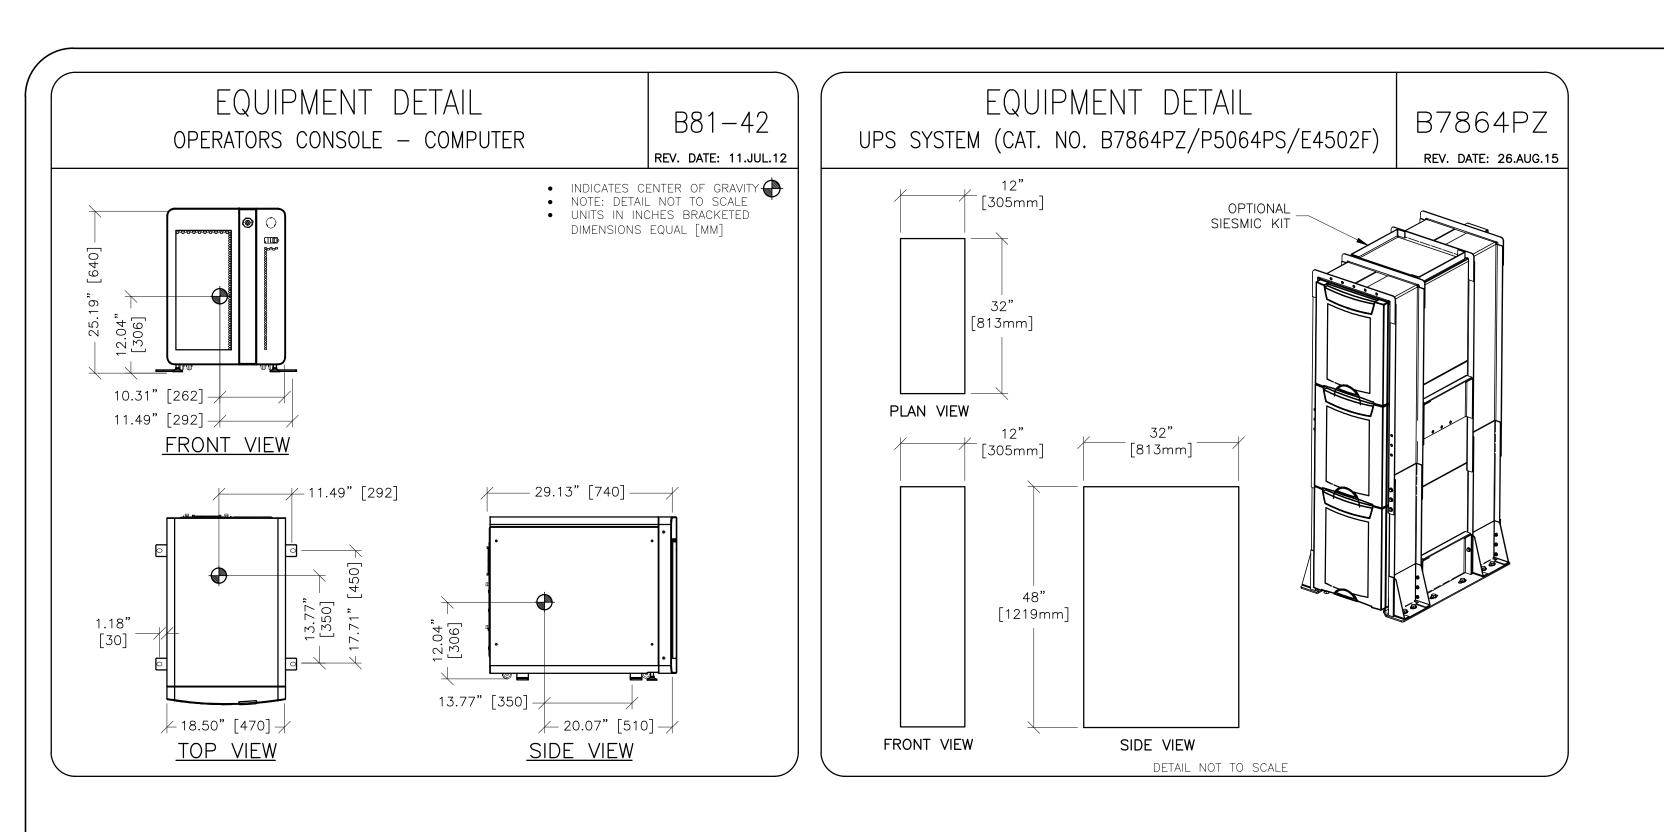

96

**GE Healthcare** 

 $abla \overline{\langle}$ 

PROJECT REVISION 12-24f 05

DATE: 06.JUN.16

CHECKED BY: REK

REVISION HISTORY:

DRAWN BY:

TITLE: EQUIPMENT DETAILS

YPE: OPTIMA PET/CT 560

THIS SHEET IS PART OF THE DOCUMENT SET LISTED ON SHEET C1 AND SHOULD NOT BE SEPARATED